



mounting holes also supplied
for mounting to 4" octagonal
junction box
(box supplied by others)


2" x 3" junction box
(supplied by others)

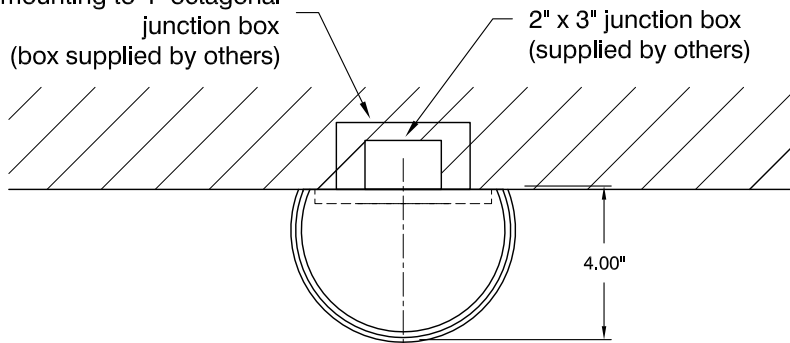

TOP VIEW

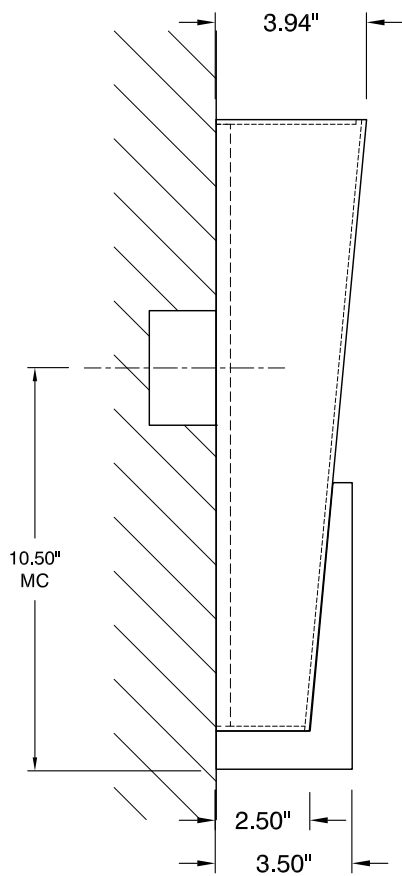

SIDE VIEW

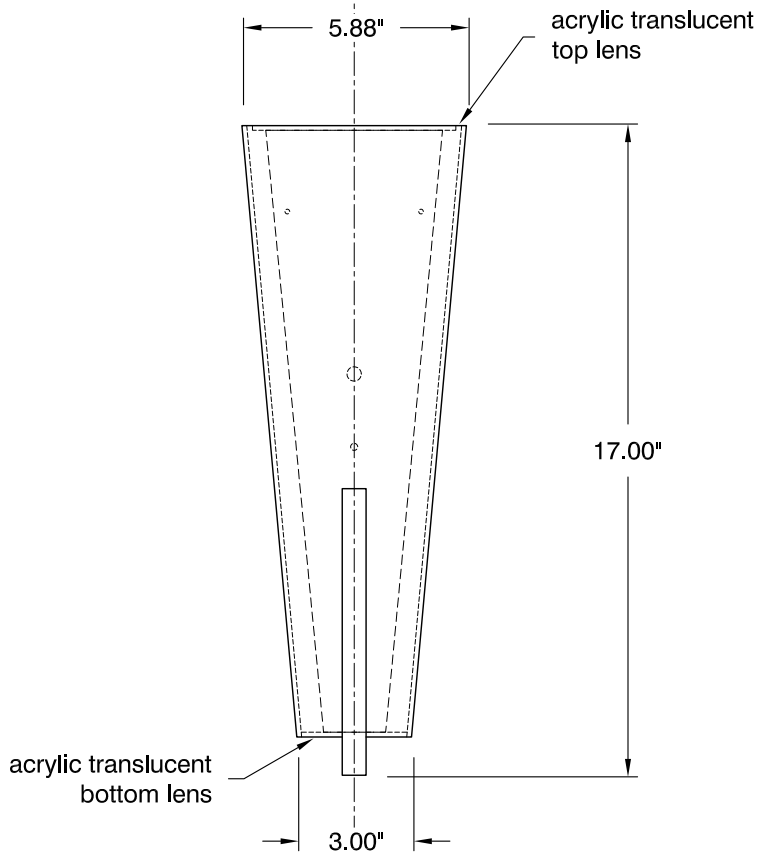

FRONT VIEW

SONGBIRD sconce
oxygen **3-579-124**

OXYGEN LIGHTING ©

LAMPING

- o (1x) 8w LED array
- o 3000k, 430mA (ea.)
- L/W 125 at array level
- o CRI >80
- o 60000 Hr Life Span
- o Color Consistency: 3 Step MacAdams Ellipse

DRIVER (Non dimable)

- o Constant Current, 13w, 300mA,

INPUT VOLTAGE

120/277v, 50/60 Hz

DIFFUSERS

- o 1 - white opal glass
- o 2 - matte white acrylic
- o 3 - tobacco acrylic
- o 4 - faux onyx acrylic
- o 6 - silver cloth acrylic
- o 7 - wave pattern acrylic
- o 8 - leaf acrylic

METAL FINISHES

- o 24 - satin nickel
- o 14 - polished chrome

INSTALLATION

- o 2" x 3" or 4" octagonal "J"- Box
- o ETL Dry/Damp Listed
- o ADA
- o Conforms to UL STD 1598
- o Certified CAN/CSA STD C22.2 No. 250.0

DIMENSIONS

- o 5.875" (w) x 17" (h)
- o 4" ext. from wall

Sample Catalog Number

Series #	Diffuser	Finish	Catalog number
3-579	2	24	= 3-579-224

oxygen

OXYGEN LIGHTING
201 RAILHEAD RD, FORT WORTH, TX 76106
TEL. (877) 607-0202 FAX (877) 607-0203
WWW.OXYGENLIGHTING.COM

PROJECT: _____

DATE: _____

