

**DECCA Pendant**  
**3-48-xxxx**

oxygen

FIXTURE TYPE \_\_\_\_\_

LOCATION \_\_\_\_\_

PROJECT \_\_\_\_\_

DATE \_\_\_\_\_



-5224 White Oak/Satin Nickel




-2440 Walnut/Aged Brass  
(with Aged Brass Canopy)



-1540 Black Oak/Aged Brass  
(with Aged Brass Canopy)

<b>LIGHT SOURCE</b>	LED Array, 3000K, CRI 90
<b>LUMINAIRE POWER</b>	38.1W at 120V
<b>RATED LIFE</b>	50000 hr RL
<b>OPTIONAL COLOR TEMPERATURES</b>	3000K Only
<b>LUMEN OUTPUT</b>	Delivered: 733 lm (LM-79)
<b>INPUT VOLTAGE</b>	120V AC, 60Hz
<b>DRIVER OUTPUT</b>	24Vdc Constant Voltage, 1.7A max current
<b>DIMMING</b>	TRIAC Dimming (Forward Phase, Magnetic Low Voltage)
<b>CONSTRUCTION</b>	Cold Rolled Steel Canopy, Wood Housing
<b>DIFFUSER</b>	- Matte White Acrylic
<b>FINISHES</b>	Black Oak/Aged Brass (-1540), Walnut/Aged Brass (-2440), White Oak/Satin Nickel (-5224)
<b>MOUNTING</b>	4" Octagonal J-Box
<b>STANDARDS</b>	ETL Dry listed, Conforms to UL STD 1598, Certified CAN/CSA STD C22.2 No 250.0.

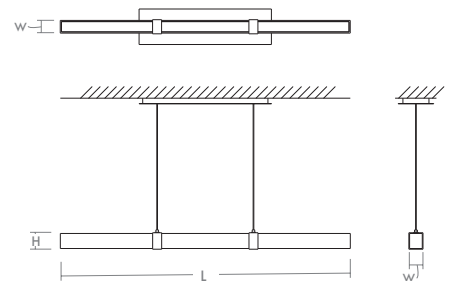

**DIMENSIONS**

**Canopy: 22.00" L x 6.00" W x 1.00" H**

**Fixture: 48.25" L x 2.125" W x 2.75" H**

**\* Hanging height adjustable  
with 10ft. cables**

Order example for standard fixture:  
**3-48-1540** (x- Voltage - xxx-Sequence # - xx-Finish)  
3: 120V Only

