

# ELEMENTS Wall Sconce

120v : **3-5120-xx**

# oxygen

FIXTURE TYPE \_\_\_\_\_

LOCATION \_\_\_\_\_

PROJECT \_\_\_\_\_

DATE \_\_\_\_\_




**-24 Satin Nickel**



**-14 Polished Chrome**

<b>LIGHT SOURCE</b>	1 x 7W Max LED GU10 Base (Lamp not included)
<b>LUMINAIRE POWER</b>	7.04W at 120V
<b>RATED LIFE</b>	See LED bulb manufacturer specification
<b>LUMEN OUTPUT</b>	Delivered: 450 lm (LM-79)
<b>INPUT VOLTAGE</b>	120V
<b>DRIVER OUTPUT</b>	No
<b>CONSTRUCTION</b>	Plated Steel and Glass
<b>DIFFUSER</b>	- White Opal Glass
<b>FINISHES</b>	Polished Chrome (-14), Satin Nickel (-24)
<b>MOUNTING</b>	2" x 3" J-Box
<b>STANDARDS</b>	ETL Dry/Damp listed, ADA Compliant, Conforms to UL STD 1598, Certified CAN/CSA, STD C22.2 No 250.0.

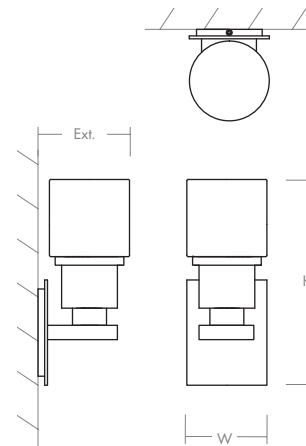

#### DIMENSIONS

**W:** 3.50"

**H:** 9.00"

**Ext:** 4.00"

**M.C:** 6.70" From Top of Fixture

Order example for standard fixture:

**3-5120-24** (x- Voltage - xxx-Sequence # - xx-Finish)

**3:** 120v

