

# PATHWAYS Wall Sconce

oxygen

120v : **3-523-xxx-EM**

277v : **37-523-xxx-EM**

FIXTURE TYPE \_\_\_\_\_

LOCATION \_\_\_\_\_

PROJECT \_\_\_\_\_

DATE \_\_\_\_\_



-95 Old World



-24 Satin Nickel

**Diffusers:**



-2 Matte White Acrylic




-3 Tobacco Acrylic



-6 Silver Cloth Acrylic

<b>LIGHT SOURCE</b>	1 x 10.1W LED, 3000K, CRI 90
<b>LUMINAIRE POWER</b>	12.9W at 120V
<b>RATED LIFE</b>	60000 hr RL
<b>OPTIONAL COLOR TEMPERATURES</b>	2700K, 3500K, 4000K
<b>LUMEN OUTPUT</b>	Delivered: (-2) Acrylic: 1m (LM-79) (-3) Acrylic: 836 lm (LM-79) (-6) Acrylic: 527 lm (LM-79)
<b>INPUT VOLTAGE</b>	120V or 277V
<b>DRIVER OUTPUT</b>	350mA, 12W
<b>DIMMING</b>	0-10v & Phase (ELV) Dimming - 50/60Hz 100% to 10% Dimming
<b>CONSTRUCTION</b>	Plated Steel and Acrylic
<b>METAL FINISH / DIFFUSER</b>	(-224) Matte White Acrylic / Satin Nickel (-295) Matte White Acrylic / Old World (-324) Tobacco Acrylic / Satin Nickel (-395) Tobacco Acrylic / Old World (-624) Silver Cloth Acrylic / Satin Nickel (-695) Silver Cloth Acrylic / Old World
<b>MOUNTING</b>	4" Octagonal J-Box
<b>STANDARDS</b>	ETL Dry/Damp listed, ADA compliant, Conforms to UL STD 1598, Certified CAN/CSA, STD C22.2 No 250.0.

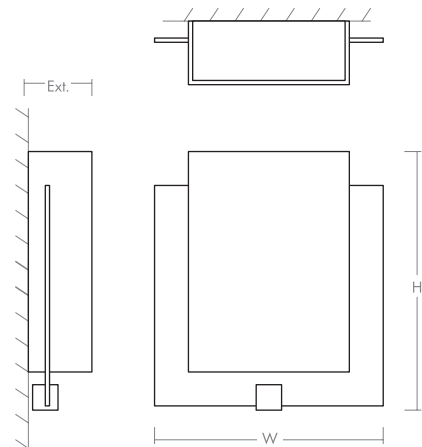

**DIMENSIONS**

<b>W:</b>	<b>13.63"</b>
<b>H:</b>	<b>14.89"</b>
<b>Ext:</b>	<b>3.75"</b>
<b>M.C:</b>	<b>6.41" From top of fixture</b>

**EM Driver:** Fullham HotspotLED Series  
**EM Battery Life:** 90 minutes minimum

Order example for standard fixture:

**3-523-24-EM** (x- Voltage - xxx-Sequence # - x-Diffuser - xx-Finish)

3: 120v, 37: 277v

Order example for optional color temperatures: **3-523-2724-EM**

27: 2700K, 35: 3500K, 40: 4000K

