

**BALANCE Vanity**  
**3-547-xx-BPxx**


oxygen

FIXTURE TYPE \_\_\_\_\_ LOCATION \_\_\_\_\_

PROJECT \_\_\_\_\_ DATE \_\_\_\_\_




-24 Satin Nickel

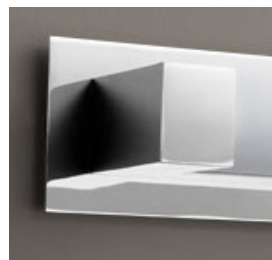

-20 Polished Nickel

<b>LIGHT SOURCE</b>	1 x 11.6W LED, 3000K, CRI 90
<b>LUMINAIRE POWER</b>	14.5W at 120V
<b>RATED LIFE</b>	60000 hr RL
<b>OPTIONAL COLOR TEMPERATURES</b>	2700K, 3500K, 4000K
<b>LUMEN OUTPUT</b>	Delivered: 1020 lm (LM-79)
<b>INPUT VOLTAGE</b>	120V to 277V AC, 50/60Hz
<b>DRIVER OUTPUT</b>	350mA, 14.7W max
<b>DIMMING</b>	TRIAC and ELV dimming at 120V AC; 0-10V dimming, 100% to 10% current output
<b>CONSTRUCTION</b>	Plated Steel and Acrylic
<b>DIFFUSER</b>	-Matte White Acrylic
<b>FINISHES</b>	Polished Nickel (-20), Satin Nickel (-24)
<b>MOUNTING</b>	4" Octagonal J-Box*, 4"x 4" J-Box* with single device mud ring *Deep J-Box (Required to house driver)
<b>STANDARDS</b>	UL Dry/Damp listed, ADA Compliant, CEC Title 24 Compliant, Conforms to UL STD 1598, Certified CAN/CSA, STD C22.2 No 250.0.

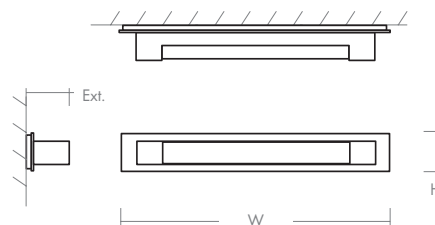

**DIMENSIONS**

<b>W:</b>	<b>28.75"</b>
<b>H:</b>	<b>4.50"</b>
<b>Ext:</b>	<b>4.00"</b>
<b>M.C:</b>	<b>2.25" From top of fixture</b>

Order example for standard fixture:

**3-547-24-BP24**

(x- Voltage - xxx-Sequence # - xx-Finish - BPxx- Backplate Finish)

3: 120V to 277V

Order example for optional color temperatures: **3-547-2724-BP24**

27: 2700K, 35: 3500K, 40: 4000K

