

BOLO Wall Sconce
3-553-xx

oxygen

FIXTURE TYPE _____


LOCATION _____

PROJECT _____

DATE _____



-24 Satin Nickel



-15 Black



-20 Polished Nickel

LIGHT SOURCE 1 x 12.0W LED, 3000K, CRI 90

LUMINAIRE POWER 14.5W at 120V

RATED LIFE 60000 hr RL

OPTIONAL COLOR TEMPERATURES 2700K, 3500K, 4000K

LUMEN OUTPUT Delivered: 600 lm (LM-79)

INPUT VOLTAGE 120V to 277V AC, 50/60Hz

DRIVER OUTPUT 350mA, 14.7W max

DIMMING TRIAC and ELV dimming at 120V AC;
 0-10V dimming, 100% to 10% current output


CONSTRUCTION Plated Steel and Acrylic

DIFFUSER Matte White Acrylic

FINISHES Black (-15), Polished Nickel (-20), Satin Nickel (-24)

MOUNTING With Small Backplate - 4" x 4" Square J-Box* with single device mud ring
 With Large Backplate - 4" Octagonal J-Box*
 *Deep J-Box (Required to house driver)

STANDARDS UL Dry/Damp listed, ADA Compliant, Conforms to UL STD 1598,
 Certified CAN/CSA, STD C22.2 No 250.0.

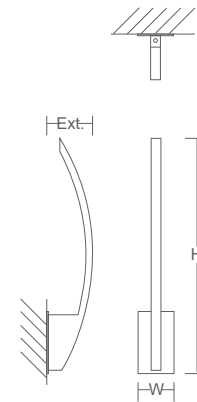

DIMENSIONS

W: 2.75" with Small Backplate

4.75" with Large Backplate

H: 18.00"

Ext: 3.50"

M.C: 15.75" From Top of Fixture

Order example for standard fixture:

3-553-xx (x-Voltage - xxx-Sequence # - xx-Finish)

Order example for optional color temperatures: **3-553-2724**

27: 2700K, **35:** 3500K, **40:** 4000K

