

# PEEPERS Wall Sconce / Ceiling Mount

120v : **3-600-xx**

277v : **37-600-xx**

# oxygen

FIXTURE TYPE \_\_\_\_\_

LOCATION \_\_\_\_\_

PROJECT \_\_\_\_\_

DATE \_\_\_\_\_



-22 Oiled Bronze




-24 Satin Nickel



-40 Aged Brass

<b>LIGHT SOURCE</b>	1 x 8.2W LED, 3000K, CRI 90
<b>LUMINAIRE POWER</b>	10.2W at 120V
<b>RATED LIFE</b>	60000 hr RL
<b>OPTIONAL COLOR TEMPERATURES</b>	2700K, 3500K, 4000K
<b>LUMEN OUTPUT</b>	Delivered: 454 lm (LM-79)
<b>INPUT VOLTAGE</b>	120V or 277V
<b>DRIVER OUTPUT</b>	350 mA, 12W
<b>DIMMING</b>	0-10v & Phase (ELV) Dimming - 50/60Hz 100% to 10% Dimming
<b>CONSTRUCTION</b>	Plated Steel and Acrylic
<b>DIFFUSER</b>	- Matte White Acrylic
<b>FINISHES</b>	Oiled Bronze (-22), Satin Nickel (-24), Aged Brass (-40)
<b>MOUNTING</b>	4" Octagonal J-Box*, 2"x 3" J-Box* *Deep J-Box
<b>STANDARDS</b>	ETL Dry/Damp listed, ADA compliant, Conforms to UL STD 1598, Certified CAN/CSA, SDT C22.2 No 250.0.

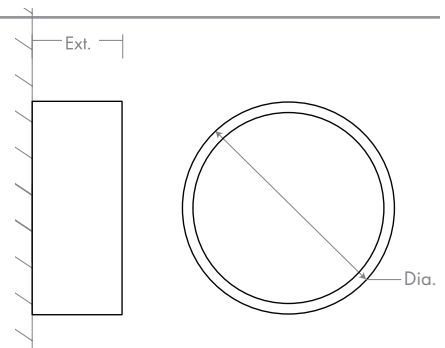

#### DIMENSIONS

**Dia.:** 4.75"

**Ext:** 2.00"

**M.C.:** 2.38" From top of fixture

Order example for standard fixture:

**3-600-22** (x- Voltage - xxx-Sequence # - xx-Finish)

3: 120v, 37: 277v, 32: Universal Voltage

Order example for optional color temperatures: **3-600-2722**

27: 2700K, 35: 3500K, 40: 4000K

