

Oracle Wall Sconce / Ceiling Mount

oxygen

120v: **3-620-xx-EM**

277v: **37-620-xx-EM**

FIXTURE TYPE _____

LOCATION _____

PROJECT _____

DATE _____



-40 Aged Brass



-14 Polished Chrome





-22 Oiled Bronze



-24 Satin Nickel

LIGHT SOURCE	2 x 10.1W LED, 3000K, CRI 90
LUMINAIRE POWER	26.3W at 120V
RATED LIFE	60000 hr RL
OPTIONAL COLOR TEMPERATURES	2700K, 3500K, 4000K
LUMEN OUTPUT	Delivered: 1952 lm (LM-79)
INPUT VOLTAGE	120V or 277V
DRIVER OUTPUT	2x 350mA, 12W
DIMMING	0-10v & Phase (ELV) Dimming - 50/60Hz 100% to 10% Dimming
CONSTRUCTION	Plated Steel and Acrylic
DIFFUSER	- Matte White Acrylic
FINISHES	Polished Chrome (-14), Oiled Bronze (-22), Satin Nickel (-24), Aged Brass (-40)
MOUNTING	4" Octagonal J-Box
STANDARDS	ETL Dry/Damp listed, Conforms to UL STD 1598, Certified CAN/CSA, STD C22.2 No 250.0.

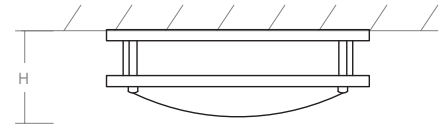

DIMENSIONS

Dia: 17.69"

H: 4.25"

EM Driver Fullham HotspotLED Series

EM Battery Life 90 Minutes Minimum

Order example for standard fixture:

3-620-22-EM (x- Voltage - xxx-Sequence # - xx-Finish)

3: 120v, 37: 277v

Order example for optional color temperatures: **3-620-2722-EM**

27: 2700K, 35: 3500K, 40: 4000K

