

# VIDA Pendant

120v : **3-6203-xx**

oxygen

FIXTURE TYPE \_\_\_\_\_ LOCATION \_\_\_\_\_

PROJECT \_\_\_\_\_ DATE \_\_\_\_\_




-22 Oiled Bronze

-24 Satin Nickel

-25 Satin Copper

<b>LIGHT SOURCE</b>	1 x 24W LED max. Medium Base PAR20/30/38; Medium Base A19, A21. (Lamp not included)
<b>LUMINAIRE POWER</b>	To be determined
<b>RATED LIFE</b>	See LED bulb manufacturer specification
<b>LUMEN OUTPUT</b>	Delivered: To be determined
<b>INPUT VOLTAGE</b>	120V
<b>DRIVER OUTPUT</b>	No
<b>CONSTRUCTION</b>	Plated Steel and Glass
<b>DIFFUSER</b>	- White Tiffany Glass
<b>FINISHES</b>	Oiled Bronze (-22), Satin Nickel (-24), Satin Copper (-25)
<b>MOUNTING</b>	4" Octagonal J-Box
<b>STANDARDS</b>	ETL Dry/Damp listed, Conforms to UL STD 1598, Certified CAN/CSA, STD C22.2 No 250.0.

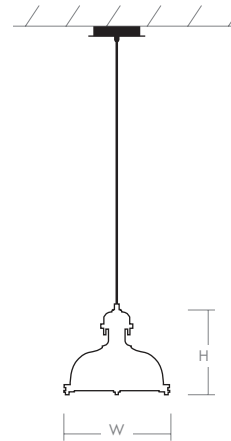

#### DIMENSIONS

**Dia. Canopy: 6.50"**

**Dia. Fixture: 16.50"**

**H. Fixture: 13.00"**

**Suspension Length: Up to 60"**

Order example for standard fixture:

**3-6203-24** (x- Voltage - xxx-Sequence # - xx-Finish)

**3:** 120v

