

SIGMA Pendant

120v : **3-6204-xx**

oxygen

FIXTURE TYPE _____ LOCATION _____

PROJECT _____ DATE _____




-24 Satin Nickel

-22 Oiled Bronze

-25 Satin Copper

LIGHT SOURCE	1 x 24W LED max. Medium Base PAR20/30/38; Medium Base A19, A21. (Lamp not included)
LUMINAIRE POWER	To be determined
RATED LIFE	See LED bulb manufacturer specification
LUMEN OUTPUT	Delivered: To be determined
INPUT VOLTAGE	120V
DRIVER OUTPUT	No
CONSTRUCTION	Plated Steel and Glass
DIFFUSER	- White Tiffany Glass
FINISHES	Oiled Bronze (-22), Satin Nickel (-24), Satin Copper (-25)
MOUNTING	4" Octagonal J-Box
STANDARDS	ETL Dry/Damp listed, Conforms to UL STD 1598, Certified CAN/CSA, STD C22.2 No 250.0.

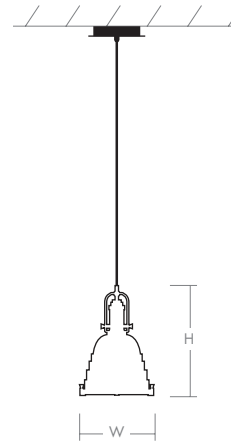

DIMENSIONS

Dia. Canopy: 6.50"

Dia. Fixture: 13.50"

H. Fixture: 18.25"

Suspension Length: Up to 60"

Order example for standard fixture:

3-6204-24 (x- Voltage - xxx-Sequence # - xx-Finish)

3: 120v

