

GALAXY Pendant

120v : **3-634-xxx**

277v : **37-634-xxx**

oxygen

FIXTURE TYPE _____ LOCATION _____

PROJECT _____ DATE _____




-2018 Coffee Ombre Glass / Gunmetal

-14 Clear Glass / Polished Chrome

-1314 Smoked Ombre Glass / Polished Chrome

-1414 Mirrored Glass / Polished Chrome

- LIGHT SOURCE** 1 x 5.12W LED, 3000K, CRI 90
- LUMINAIRE POWER** 6.57W at 120V
- RATED LIFE** 60000 hr RL
- OPTIONAL COLOR TEMPERATURES** 2700K, 3500K, 4000K
- LUMEN OUTPUT** Delivered: 327 lm (LM-79)
- INPUT VOLTAGE** 120V or 277V
- DRIVER OUTPUT** 150mA, 6W
- DIMMING** 0-10v &Phase (ELV) Dimming - 50/60Hz 100% to 10% Dimming
- CONSTRUCTION** Plated Steel and Glass
- DIFFUSER / METAL FINISHES**
 - (-14) Clear Glass / Polished Chrome
 - (-1314) Smoked Ombre Glass / Polished Chrome
 - (-1414) Mirrored Glass / Polished Chrome
 - (-2018) Coffee Ombre Glass / Gunmetal
- MOUNTING** 4" Octagonal J-Box, 2" x 3" J-Box
- STANDARDS** ETL Dry/Damp listed, Conforms to UL STD 1598, Certified CAN/CSA, STD C22.2 No 250.0.

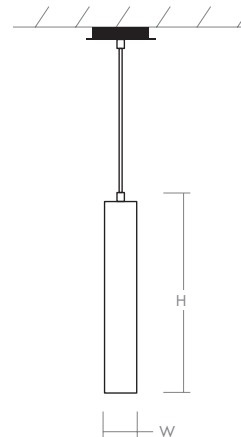

DIMENSIONS

Dia. Canopy: 5.88"

Dia. Fixture: 2.70"

H. Fixture: 16.85"

Supplied with 8 ft braided cord

Order example for standard fixture:

3-634 -1314 (x- Voltage - xxx-Sequence # - xx-Finish)

3: 120v, **37:** 277v

Order example for optional color temperatures: **3-634-271314**

27: 2700K, **35:** 3500K, **40:** 4000K

