

# IDOL Pendant

120v : **3-635-xx**

277v : **37-635-xx**



# oxygen

FIXTURE TYPE \_\_\_\_\_

LOCATION \_\_\_\_\_

PROJECT \_\_\_\_\_

DATE \_\_\_\_\_

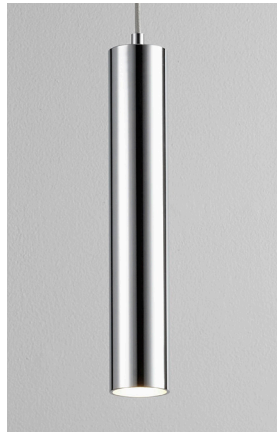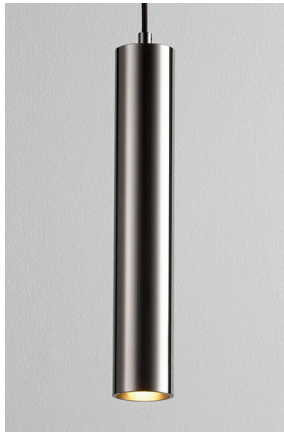


-18 Gunmetal

-14 Polished Chrome

-24 Satin Nickel

LIGHT SOURCE	1 x 5.12W LED, 3000K, CRI 90
LUMINAIRE POWER	6.64W at 120V
RATED LIFE	60000 hr RL
OPTIONAL COLOR TEMPERATURES	2700K, 3500K, 4000K
LUMEN OUTPUT	Delivered: 334 lm (LM-79)
INPUT VOLTAGE	120V or 277V
DRIVER OUTPUT	150 mA, 6W
DIMMING	0-10v & Phase (ELV) Dimming - 50/60Hz 100% to 10% Dimming
CONSTRUCTION	Plated Steel
DIFFUSER	No diffuser
FINISHES	Polished Chrome (-14), Gunmetal (-18), Satin Nickel (-24)
MOUNTING	4" Octagonal J-Box, 2" x 3" J-Box
STANDARDS	ETL Dry/Damp listed, Conforms to UL STD 1598, Certified CAN/CSA, STD C22.2 No 250.0.

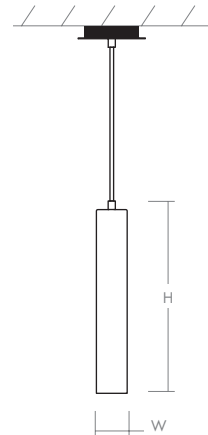

## DIMENSIONS

**Dia. Canopy: 5.88"**

**Dia. Fixture: 2.70"**

**H. Fixture: 16.85"**

**Supplied with 8 ft braided cord**

Order example for standard fixture:

**3-635-24** (x- Voltage - xxx-Sequence # - xx-Finish)

**3:** 120v, **37:** 277v

Order example for optional color temperatures: **3-635-2724**

**27:** 2700K, **35:** 3500K, **40:** 4000K

