

ECHO Pendant
3-638-xx


oxygen

FIXTURE TYPE _____

LOCATION _____

PROJECT _____

DATE _____

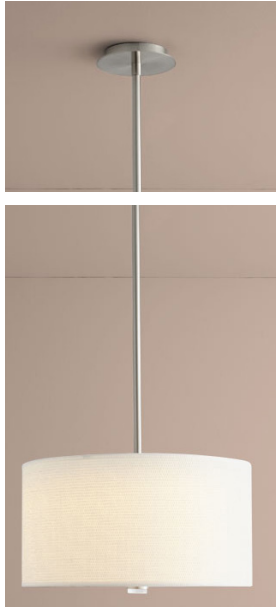


-24 Satin Nickel



-22 Oiled Bronze

- LIGHT SOURCE** 39W at 120V
- LUMINAIRE POWER** 3 x 10.1W LED, 3000K, CRI 90
- RATED LIFE** 60000 hr RL
- OPTIONAL COLOR TEMPERATURES** 2700K, 3500K, 4000K
- LUMEN OUTPUT** Delivered: 1365 lm (LM-79)
- INPUT VOLTAGE** 120V to 277V AC, 50/60Hz
- DRIVER OUTPUT** 1050mA, 44.1W max
(1 x 350mA, 14.7W; 1 x 700mA, 29.4W)
- DIMMING** TRIAC and ELV dimming at 120V AC;
0-10V dimming, 100% to 10% current output
- CONSTRUCTION** Plated Steel and Acrylic / Fabric White
- DIFFUSER** Grass Shade with Acrylic
- METAL FINISH** Satin Nickel (-24), Oiled Bronze (-22)
- MOUNTING** 4" Octagonal J-Box,
4"x4" J-Box with a single device mud ring
- STANDARDS** ETL Dry/Damp listed, Conforms to UL STD 1598,
Certified CAN/CSA, STD C22.2 No 250.0.

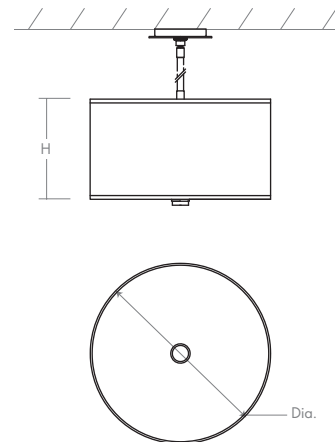

- DIMENSIONS**
- Dia. Canopy:** 6.25"
 - Dia Fixture:** 18.00"
 - H. Fixture:** 10.59"
 - Suspension Length: Up to 60"**

Order example for standard fixture:
3-638-24 (x- Voltage - xxx-Sequence # - xx-Finish)
3: 120V to 277V
 Order example for optional color temperatures: **3-638-2724**
27: 2700K, **35:** 3500K, **40:** 4000K

