

ECHO Pendant
3-640-24


oxygen

FIXTURE TYPE _____ LOCATION _____
 PROJECT _____ DATE _____



-24 Satin Nickel

LIGHT SOURCE	4 x 10.1W LED, 3000K, CRI 90
LUMINAIRE POWER	48.2W at 120V
RATED LIFE	60000 hr RL
OPTIONAL COLOR TEMPERATURES	2700K, 3500K, 4000K
LUMEN OUTPUT	Delivered: 2775 lm (LM-79)
INPUT VOLTAGE	120V to 277V AC, 50/60Hz
DRIVER OUTPUT	2 x 700mA, 29.4W max power per driver
DIMMING	TRIAC and ELV dimming at 120V AC; 0-10V dimming, 100% to 1% current output
CONSTRUCTION	Plated Steel and Acrylic/Fabric
DIFFUSER	White Grass Shade with Acrylic
FINISHES	Satin Nickel (-24)
MOUNTING	4" Octagonal J-Box, 4" Square J-Box with a single device mud ring
STANDARDS	UL Dry/Damp listed, Conforms to UL STD 1598, Certified CAN/CSA STD C22.2 No 250.0.

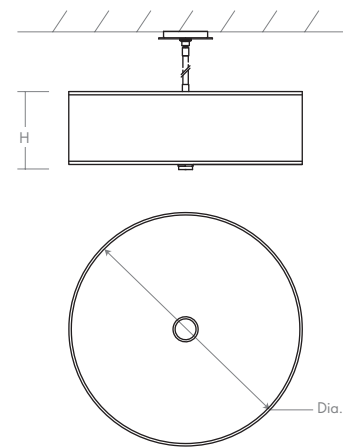

DIMENSIONS

Dia. Canopy:	6.25"
Dia. Fixture:	30.00"
H. Fixture:	10.625"
Suspension Length:	Up to 60"

Note: Customer must specify desired length of downrod.

Order example for standard fixture:
3-640-24 (x- Voltage - xxx-Sequence # - xx-Finish)
 3: 120V to 277V
 Order example for optional color temperatures: **3-640-2724**
 27: 2700K, 35: 3500K, 40: 4000K

