

COMET Pendant

120v : **3-650-xxxx**

277v : **37-650-xxxx**

oxygen

FIXTURE TYPE _____ LOCATION _____

PROJECT _____ DATE _____




-2018 Coffee Ombre Glass / Gunmetal

-14 Clear Glass / Polished Chrome

-1314 Smoked Ombre Glass / Polished Chrome

| | |
|------------------------------------|--|
| LIGHT SOURCE | 1 x 5.12W LED, 3000K, CRI 90 |
| LUMINAIRE POWER | 6.55W at 120V |
| RATED LIFE | 60000 hr RL |
| OPTIONAL COLOR TEMPERATURES | 2700K, 3500K, 4000K |
| LUMEN OUTPUT | Delivered: 410 lm (LM-79) |
| INPUT VOLTAGE | 120V or 277V |
| DRIVER OUTPUT | 150mA, 6W |
| DIMMING | 0-10v & Phase (ELV) Dimming - 50/60Hz 100% to 10% Dimming |
| CONSTRUCTION | Plated Steel and Glass |
| DIFFUSER/METAL FINISHES | (-14) Clear Glass / Polished Chrome (-1314) Smoked Ombre Glass / Polished Chrome (-2018) Coffee Ombre Glass / Gunmetal |
| MOUNTING | 4" Octagonal J-Box, 2" x 3" J-Box |
| STANDARDS | ETL Dry/Damp listed, Conforms to UL STD 1598, Certified CAN/CSA, STD C22.2 No 250.0. |

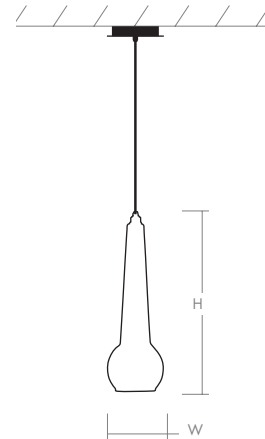

DIMENSIONS

Dia. Canopy: 5.75"

Dia. Fixture: 4.80"

H. Fixture: 17.25"

Supplied with 8 ft braided cord

Order example for standard fixture:

3-650-1314 (x- Voltage - xxx-Sequence # - x-Diffuser - xx-Finish)

3: 120v, **37:** 277v

Order example for optional color temperatures: **3-650-271314**

27: 2700K, **35:** 3500K, **40:** 4000K

