

LIBERTY Pendant

3-652-xxxx

oxygen

FIXTURE TYPE _____ LOCATION _____

PROJECT _____ DATE _____



-1314 Smoked Ombre Glass / Polished Chrome

-14 Clear Glass / Polished Chrome


-2018 Coffee Ombre Glass / Gunmetal

LIGHT SOURCE 1 x 6.2W LED, 3000K, CRI 90
LUMINAIRE POWER 6.57W at 120V
RATED LIFE 60000 hr RL
OPTIONAL COLOR TEMPERATURES 2700K, 3500K, 4000K
LUMEN OUTPUT Delivered: 401 lm (LM-79)
INPUT VOLTAGE 120V to 277V AC, 50/60Hz
DRIVER OUTPUT 180mA, 7.6W max
DIMMING TRIAC and ELV dimming at 120V AC; 0-10V dimming, 100% to 10% current output
CONSTRUCTION Plated Steel and Glass

DIFFUSER/METAL FINISHES (-14) Clear Glass / Polished Chrome
(-1314) Smoked Ombre Glass / Polished Chrome
(-2018) Coffee Ombre Glass / Gunmetal

MOUNTING 4" Octagonal J-Box*,
4"x4" J-Box* with a single device mud ring
*Deep J-Box (Required to house driver)

STANDARDS ETL Dry/Damp listed, Conforms to UL STD 1598,
Certified CAN/CSA, STD C22.2 No 250.0.

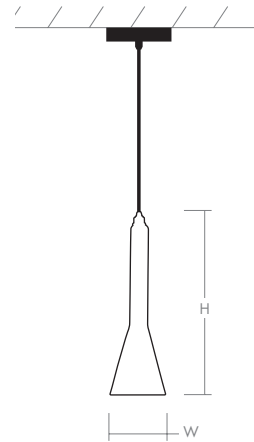

DIMENSIONS

Dia. Canopy: 5.75"

Dia. Fixture: 4.50"

H. Fixture: 16.25"

Supplied with 8 ft braided cord

Order example for standard fixture:

3-652-1314 (x- Voltage - xxx-Sequence # - x-Diffuser - xx-Finish)

3: 120V to 277V

Order example for optional color temperatures: **3-652-271314**

27: 2700K, **35:** 3500K, **40:** 4000K

