

LIBERTY Pendant

3-652-xxxx

oxygen

FIXTURE TYPE _____ LOCATION _____

PROJECT _____ DATE _____




-1314 Smoked Ombre Glass/
Polished Chrome

-14 Clear Glass/Polished
Chrome

- 2018 Coffee Ombre Glass/
Gunmetal

- LIGHT SOURCE** 1 x 6.1W LED, 3000K, CRI 90
- LUMINAIRE POWER** 7.2W at 120V
- RATED LIFE** 60000 hr RL
- OPTIONAL COLOR TEMPERATURES** 2700K, 3500K, 4000K
- LUMEN OUTPUT** Delivered: 401 lm (LM-79)
- INPUT VOLTAGE** 120V to 277V AC, 50/60Hz
- DRIVER OUTPUT** 180mA, 7.6W max output
- DIMMING** TRIAC and ELV dimming at 120V AC;
0-10V dimming, 100% to 1% current output
- CONSTRUCTION** Plated Steel and Glass
- DIFFUSER/
METAL FINISHES** (-14) Clear Glass/Polished Chrome
(-1314) Smoked Ombre Glass/Polished Chrome
(-2018) Coffee Ombre Glass/Gunmetal
- MOUNTING** 4" Octagonal J-Box*,
4" Square J-Box* with a single device mud ring
*Deep J-Box (Required to house driver)
- STANDARDS** UL Dry/Damp listed, Conforms to UL STD 1598,
Certified CAN/CSA STD C22.2 No 250.0.

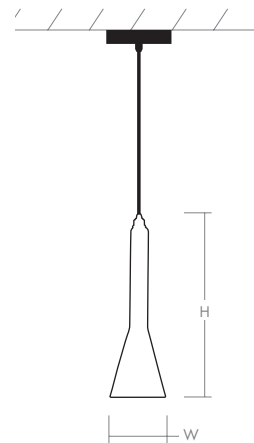

DIMENSIONS

Dia. Canopy: 5.75"

Dia. Fixture: 5.00"

H. Fixture: 16.25"

Supplied with 10 ft braided cord

Order example for standard fixture:

3-652-1314 (x- Voltage - xxx-Sequence # - x-Diffuser - xx-Finish)

3: 120V to 277V

Order example for optional color temperatures: **3-652-271314**

27: 2700K, **35:** 3500K, **40:** 4000K

