

PYRUS Pendant

3-655-xxxx

oxygen

FIXTURE TYPE _____ LOCATION _____

PROJECT _____ DATE _____



-2018 Coffee Ombre Glass / Gunmetal

-14 Clear Glass / Polished Chrome

-1314 Smoked Ombre Glass / Polished Chrome

- LIGHT SOURCE** 1 x 6.2W LED, 3000K, CRI 90
- LUMINAIRE POWER** 6.63W at 120V
- RATED LIFE** 60000 hr RL
- OPTIONAL COLOR TEMPERATURES** 2700K, 3500K, 4000K
- LUMEN OUTPUT** Delivered: 406 lm (LM-79)
- INPUT VOLTAGE** 120V to 277V AC, 50/60Hz
- DRIVER OUTPUT** 180mA, 7.6W max
- DIMMING** TRIAC and ELV dimming at 120V AC; 0-10V dimming, 100% to 10% current output
- CONSTRUCTION** Plated Steel and Glass

DIFFUSER/METAL FINISHES (-14) Clear Glass / Polished Chrome
(-1314) Smoked Ombre Glass / Polished Chrome
(-2018) Coffee Ombre Glass / Gunmetal

MOUNTING 4" Octagonal J-Box*,
4"x4" J-Box* with a single device mud ring
*Deep J-Box (Required to house driver)

STANDARDS ETL Dry/Damp listed, Conforms to UL STD 1598,
Certified CAN/CSA, STD C22.2 No 250.0.


Order example for standard fixture:

3-655-2018 (x- Voltage - xxx-Sequence # - x-Diffuser - xx-Finish)

3: 120V to 277V

Order example for optional color temperatures: **3-655-272018**

27: 2700K, **35:** 3500K, **40:** 4000K

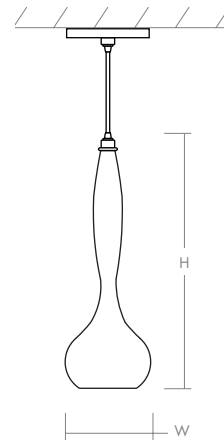

DIMENSIONS

Dia. Canopy: 5.75"

Dia. Fixture: 6.63"

H. Fixture: 17.80"

Supplied with 8 ft braided cord

