

PYRUS Pendant

120v : **3-655-xxxx**

277v : **37-655-xxxx**

oxygen

FIXTURE TYPE _____ LOCATION _____

PROJECT _____ DATE _____




-2018 Coffee Ombre Glass /
Gunmetal

-14 Clear Glass / Polished
Chrome

-1314 Smoked Ombre Glass /
Polished Chrome

LIGHT SOURCE	1 x 5.12W LED, 3000K, CRI 90
LUMINAIRE POWER	6.63W at 120V
RATED LIFE	60000 hr RL
OPTIONAL COLOR TEMPERATURES	2700K, 3500K, 4000K
LUMEN OUTPUT	Delivered: 406 lm (LM-79)
INPUT VOLTAGE	120V or 277V
DRIVER OUTPUT	150mA, 6W
DIMMING	0-10v & Phase (ELV) Dimming - 50/60Hz 100% to 10% Dimming
CONSTRUCTION	Plated Steel and Glass
DIFFUSER/METAL FINISHES	(-14) Clear Glass / Polished Chrome (-1314) Smoked Ombre Glass / Polished Chrome (-2018) Coffee Ombre Glass / Gunmetal
MOUNTING	4" Octagonal J-Box, 2" x 3" J-Box
STANDARDS	ETL Dry/Damp listed, Conforms to UL STD 1598, Certified CAN/CSA, STD C22.2 No 250.0.

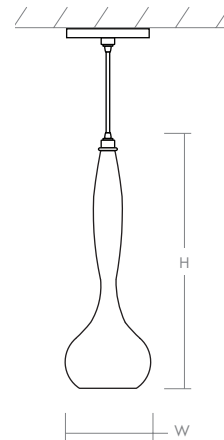

DIMENSIONS

Dia. Canopy: 5.75"

Dia. Fixture: 6.63"

H. Fixture: 17.80"

Supplied with 8 ft braided cord

Order example for standard fixture:

3-655-2018 (x- Voltage - xxx-Sequence # - x-Diffuser - xx-Finish)

3: 120v, **37:** 277v

Order example for optional color temperatures: **3-655-272018**

27: 2700K, **35:** 3500K, **40:** 4000K

