

ELLIPSE Pendant

120V: **3-667-xxx**
277V: **37-667-xxx**

oxygen

FIXTURE TYPE _____ LOCATION _____

PROJECT _____ DATE _____



-24 Satin Nickel



-15 Black



-20 Polished Nickel



-1 White Opal Glass
-2 Matte White Acrylic

LIGHT SOURCE

1 x 5.2W LED, 3000K, CRI 90

LUMINAIRE POWER

6.59W at 120V

RATED LIFE

60000 hr RL

OPTIONAL COLOR TEMPERATURES

2700K, 3500K, 4000K

LUMEN OUTPUT

Delivered: (-1) Glass: 147 lm (LM-79)
Delivered: (-2) Acrylic: 158 lm (LM-79)

INPUT VOLTAGE

120V or 277V

DRIVER OUTPUT

150mA, 6W max

DIMMING

0-10V & Phase (ELV) Dimming - 50/60Hz
100% to 10% Dimming

CONSTRUCTION

Plated Steel and Acrylic / Glass

METAL FINISH / DIFFUSER


(-115) White Opal Glass / Black
(-120) White Opal Glass / Polished Nickel
(-124) White Opal Glass / Satin Nickel
(-215) Matte White Acrylic / Black
(-220) Matte White Acrylic / Polished Nickel
(-224) Matte White Acrylic / Satin Nickel

MOUNTING

4" Octagonal J-Box*
4"x4" Square J-Box* with single device mud ring
*Deep J-Box (Required to house driver)

STANDARDS

ETL Dry/Damp listed, Conforms to UL STD 1598,
Certified CAN/CSA STD C22.2 No 250.0.

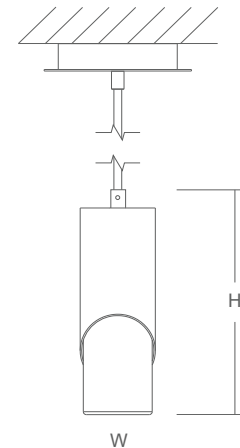

DIMENSIONS

Dia. Canopy: 5.88"

Dia. Fixture: 3.00"

H. Fixture: 9.25"

Note: Provided with 10 ft. of Braided Cord

Order example for standard fixture:

3-667-xxx (x-Voltage - xxx-Sequence # - x-Diffuser - xx-Finish)

3: 120V, **37:** 277V

Order example for optional color temperatures: **3-667-27124**

27: 2700K, **35:** 3500K, **40:** 4000K

