

LUNA Pendant

120v : **3-672-xx**
277v: **37-672-xx**

oxygen

FIXTURE TYPE _____ LOCATION _____

PROJECT _____ DATE _____




-24 Satin Nickel

-20 Polished Nickel

-22 Oiled Bronze

-40 Aged Brass

LIGHT SOURCE	1 x 8.2W LED, 3000K, CRI 90
LUMINAIRE POWER	10.4W at 120V
RATED LIFE	60000 hr RL
OPTIONAL COLOR TEMPERATURES	2700K, 3500K, 4000K
LUMEN OUTPUT	Delivered: 714 lm (LM-79)
INPUT VOLTAGE	120V or 277V
DRIVER OUTPUT	350 mA, 12W
DIMMING	0-10v &Phase (ELV) Dimming 50/60Hz 100% to 10% Dimming
CONSTRUCTION	Plated Steel and Glass
DIFFUSER	- White Opal Glass
FINISHES	Polished Nickel (-20), Oiled Bronze (-22), Satin Nickel (-24), Aged Brass (-40)
MOUNTING	4" Octagonal J-Box, 2"x 3" J-Box
STANDARDS	ETL Dry/Damp listed, ADA compliant, Conforms to UL STD 1598, Certified CAN/CSA, STD C22.2 No 250.0.

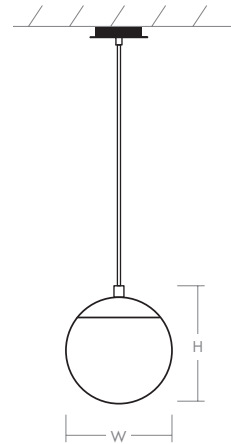

DIMENSIONS

Dia. Canopy: 5.88"

W. Fixture: 9.88"

H. Fixture: 10.50"

Supplied with 8 ft braided cord

Order example for standard fixture:

3-672-24 (x- Voltage - xxx-Sequence # - xx-Finish)

3: 120v, 37: 277v

Order example for optional color temperatures: **3-672-2724**

27: 2700K, 35: 3500K, 40: 4000K

