

**LUNA Pendant**  
**3-673-xx**


oxygen

FIXTURE TYPE \_\_\_\_\_ LOCATION \_\_\_\_\_  
PROJECT \_\_\_\_\_ DATE \_\_\_\_\_



-40 Aged Brass                      -20 Polished Nickel                      -22 Oiled Bronze                      -24 Satin Nickel

**LIGHT SOURCE** 1 x 10.1W LED, 3000K, CRI 90  
**LUMINAIRE POWER** 12.4 W at 120V  
**RATED LIFE** 60000 hr RL  
**OPTIONAL COLOR TEMPERATURES** 2700K, 3500K, 4000K  
**LUMEN OUTPUT** Delivered: 740 lm (LM-79)  
**INPUT VOLTAGE** 120V to 277V AC, 50/60Hz  
**DRIVER OUTPUT** 350mA, 14.7W max power  
**DIMMING** TRIAC and ELV dimming at 120V AC; 0-10V dimming, 100% to 1% current output  
**CONSTRUCTION** Plated Steel and Glass  
**DIFFUSER** - White Opal Glass  
**FINISHES** Polished Nickel (-20), Oiled Bronze (-22), Satin Nickel (-24), Aged Brass (-40)  
**MOUNTING** 4" Octagonal J-Box\*, 4" Square J-Box\* with a single device mud ring \*Deep J-Box (Required to house driver)  
**STANDARDS** UL Dry/Damp listed, Conforms to UL STD 1598, Certified CAN/CSA STD C22.2 No 250.0.

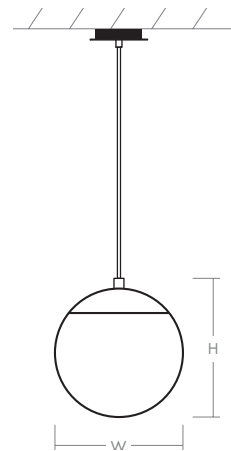

**DIMENSIONS**  
**Dia. Canopy: 5.88"**  
**W. Fixture: 12.00"**  
**H. Fixture: 13.75"**  
**Supplied with 10 ft braided cord**

Order example for standard fixture:  
**3-673-24** (x- Voltage - xxx-Sequence # - xx-Finish)  
**3:** 120V to 277V  
 Order example for optional color temperatures: **3-673-2724**  
**27:** 2700K, **35:** 3500K, **40:** 4000K

