

MODULO Ceiling Mount
3-683-xx-EM

oxygen

FIXTURE TYPE _____

LOCATION _____

PROJECT _____

DATE _____




-40 Aged Brass



-24 Satin Nickel

LIGHT SOURCE	2 x 10.1W LED, 3000K, CRI 90
LUMINAIRE POWER	26.2W at 120V
RATED LIFE	60000 hr RL
LUMEN OUTPUT	Delivered: 1742 lm (LM-79)
INPUT VOLTAGE	120V to 277V AC, 50/60Hz
DRIVER OUTPUT	700mA, 29.4W
DIMMING	TRIAC and ELV dimming at 120V AC; 0-10V dimming, 100% to 10% current output
CONSTRUCTION	Plated Steel and Acrylic
DIFFUSER	- Matte White Acrylic
FINISHES	Satin Nickel (-24), Aged Brass (-40)
MOUNTING	4" Octagonal J-Box
STANDARDS	ETL Dry/Damp listed, Conforms to UL STD 1598, Certified CAN/CSA, STD C22.2 No 250.0.

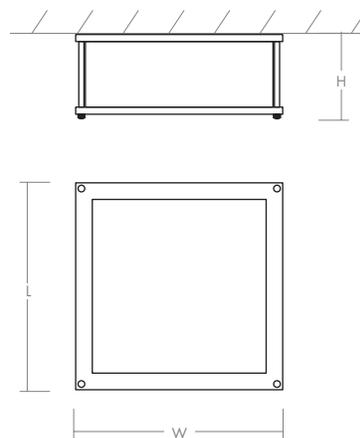

DIMENSIONS

W:	16.19"
L:	16.19"
H:	4.90"

EM Driver	Fullham HotspotLED Series
EM Battery Life	90 Minutes Minimum

Order example for standard fixture:
3-683-24-EM (x- Voltage - xxx-Sequence # - xx-Finish)
3: 120V to 277V

