

# KARME Outdoor

120v : **3-739-xx**

277v : **37-739-xx**

# oxygen

FIXTURE TYPE \_\_\_\_\_

LOCATION \_\_\_\_\_

PROJECT \_\_\_\_\_

DATE \_\_\_\_\_




-16 Gray



-22 Oiled Bronze

<b>LIGHT SOURCE</b>	1 x 11.9W LED, 3000K, CRI 90
<b>LUMINAIRE POWER</b>	15.3W at 120V
<b>RATED LIFE</b>	60000 hr RL
<b>OPTIONAL COLOR TEMPERATURES</b>	2700K, 3500K, 4000K
<b>LUMEN OUTPUT</b>	Delivered: 374 lm (LM-79)
<b>INPUT VOLTAGE</b>	120V or 277V
<b>DRIVER OUTPUT</b>	350 mA, 12W
<b>DIMMING</b>	0-10v &Phase (ELV) Dimming - 50/60Hz 100% to 10% Dimming
<b>CONSTRUCTION</b>	Cast aluminium and Polycarbonate
<b>DIFFUSER</b>	- Polished White Polycarbonate
<b>FINISHES</b>	Gray (-16), Oiled Bronze (-22)
<b>MOUNTING</b>	2" x 3" J-Box (Installer must provide a bead of caulk between fixture housing and mounting surface)
<b>STANDARDS</b>	ETL Wet, ADA compliant, Conforms to UL STD 1598, Certified CAN/CSA, STD C22.2 No 250.0.

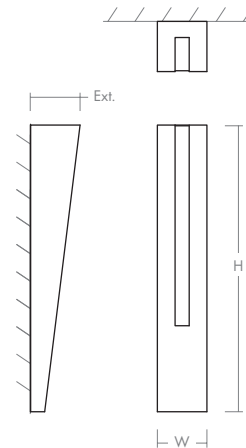

#### DIMENSIONS

**W:** 3.50"

**H:** 20.00"

**Ext:** 3.50"

**M.C:** 10.00" From top of fixture

Order example for standard fixture:

**3-739-22** (x- Voltage - xxx-Sequence # - xx-Finish)

**3:** 120v, **37:** 277v

Order example for optional color temperatures: **3-739-2722**

**27:** 2700K, **35:** 3500K, **40:** 4000K

