

**ELEMENTS Pendant**  
**3-8120-xx**

oxygen

FIXTURE TYPE \_\_\_\_\_

LOCATION \_\_\_\_\_

PROJECT \_\_\_\_\_


DATE \_\_\_\_\_



-24 Satin Nickel

-14 Polished Chrome

<b>LIGHT SOURCE</b>	1 x 7W Max LED GU10 Base (Lamp not included)
<b>LUMINAIRE POWER</b>	7.09W at 120V
<b>RATED LIFE</b>	See LED bulb manufacturer specification
<b>LUMEN OUTPUT</b>	Delivered: 397 lm (LM-79)
<b>INPUT VOLTAGE</b>	120V
<b>DRIVER OUTPUT</b>	No
<b>CONSTRUCTION</b>	Plated Steel and Glass
<b>DIFFUSER</b>	- White Opal Glass
<b>FINISHES</b>	Polished Chrome (-14), Satin Nickel (-24)
<b>MOUNTING</b>	4" Octagonal J-Box
<b>STANDARDS</b>	ETL Dry/Damp listed, Conforms to UL STD 1598, Certified CAN/CSA

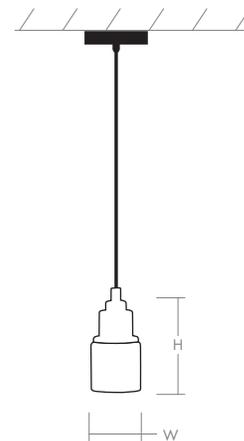

**DIMENSIONS**

<b>Dia. Canopy:</b>	<b>4.75"</b>
<b>Dia. Fixture:</b>	<b>3.50"</b>
<b>H. Fixture:</b>	<b>6.45"</b>
<b>Suspension Length:</b>	<b>Up to 60"</b>

Order example for standard fixture:  
**3-8120-24** (x- Voltage - xxx-Sequence # - xx-Finish)  
3: 120v

