

ELEMENTS Pendant

120v : **3-8130-xx**

oxygen

FIXTURE TYPE _____

LOCATION _____

PROJECT _____


DATE _____



-14 Polished Chrome

-24 Satin Nickel

LIGHT SOURCE	1 x 7W Max GU10 (Lamp not included)
LUMINAIRE POWER	7.05W at 120V
RATED LIFE	See LED bulb manufacturer specification
LUMEN OUTPUT	Delivered: 406 lm (LM-79)
INPUT VOLTAGE	120V
DRIVER OUTPUT	No
CONSTRUCTION	Plated Steel and Glass
DIFFUSER	- White Opal Glass
FINISHES	Polished Chrome (-14), Satin Nickel (-24)
MOUNTING	4" Octagonal J-Box
STANDARDS	ETL Dry/Damp listed, Conforms to UL STD 1598, Certified CAN/CSA

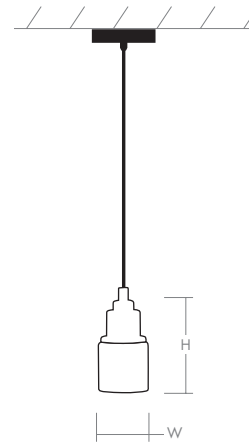

DIMENSIONS

Dia. Canopy: 4.75"

W. Fixture: 4.50"

H. Fixture: 6.45"

Suspension Length: Up to 60"

Order example for standard fixture:

3-8130-24 (x- Voltage - xxx-Sequence # - xx-Finish)

3: 120v

