

PEEPERS Wall Sconce / Ceiling Mount

Universal Voltage: **32-601-xx-EM**

oxygen

FIXTURE TYPE _____

LOCATION _____

PROJECT _____

DATE _____



-40 Aged Brass



-20 Polished Nickel



-24 Satin Nickel

LIGHT SOURCE 1 x 18.2W LED, 3000K, CRI 90

LUMINAIRE POWER 21.2W at 120V

RATED LIFE 60000 hr RL

OPTIONAL COLOR TEMPERATURES 2700K, 3500K, 4000K

LUMEN OUTPUT Delivered: 1110 lm (LM-79)

INPUT VOLTAGE Universal Voltage 120V-277V

DRIVER OUTPUT 600mA

DIMMING 0-10v - 50/60Hz 100% to 10% Dimming


CONSTRUCTION Plated Steel and Acrylic

DIFFUSER - Matte White Acrylic

FINISHES Polished Nickel (-20), Satin Nickel (-24), Aged Brass (-40)

MOUNTING 4" Octagonal J-Box, 4" Square J-Box, 2"x3" J-Box

STANDARDS ETL Dry/Damp listed, ADA compliant, Conforms to UL STD 1598, Certified CAN/CSA, STD C22.2 No 250.0.

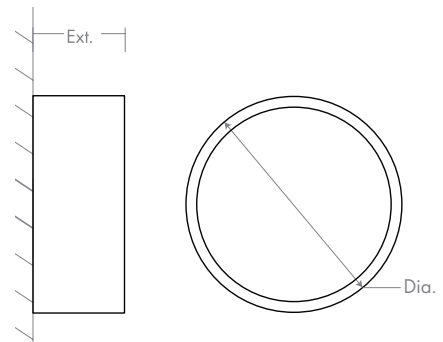

DIMENSIONS

Dia.: 10.25"

Ext: 3.375"

M.C: 5.125" From top of fixture

EM Battery Life Fullham HotspotLED Series

EM Battery Life 90 Minutes Minimum

Order example for standard fixture:

32-601-24-EM (x- Voltage - xxx-Sequence # - xx-Finish)

32: Universal Voltage

Order example for optional color temperatures: **32-601-2724-EM**

27: 2700K, 35: 3500K, 40: 4000K

