

Pyxis Wall Sconce / Ceiling Mount

32-612-xx

oxygen

FIXTURE TYPE _____

LOCATION _____

PROJECT _____

DATE _____



-40 Aged Brass




-20 Polished Nickel



-24 Satin Nickel

LIGHT SOURCE	1 x 22.2W LED, 3000K, CRI 90
LUMINAIRE POWER	26.1W at 120V
RATED LIFE	60000 hr RL
OPTIONAL COLOR TEMPERATURES	2700K, 3500K, 4000K
LUMEN OUTPUT	Delivered: 1329 lm (LM-79)
INPUT VOLTAGE	120V & 277V AC, 50/60Hz
DRIVER OUTPUT*	25.2W max power @600mA
DIMMING	TRIAC and ELV dimming at 120V AC; 0-10V dimming, 100% to 1% current output
CONSTRUCTION	Plated Steel and Acrylic
DIFFUSER	- Matte White Acrylic
FINISHES	Polished Nickel (-20), Satin Nickel (-24), Aged Brass (-40)
MOUNTING	4" Octagonal J-Box, 2" x 3" J-box
STANDARDS	UL Dry/Damp listed, ADA Compliant, Conforms to UL STD 1598, Certified CAN/CSA STD C22.2 No 250.0.

*600-1200mA programmable driver, 50.4W max power @1200mA

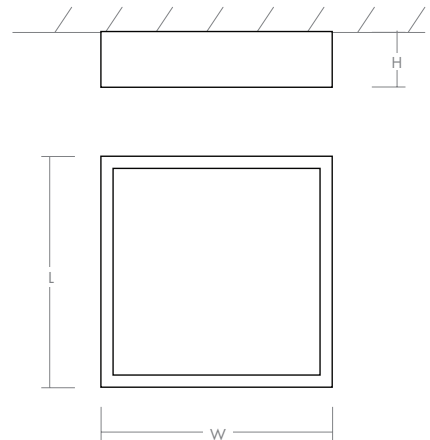

DIMENSIONS

W:	10.25"
L:	10.25"
H:	3.25"
M.C:	5.13" From top of fixture

Order example for standard fixture:

32-612-24 (x- Voltage - xxx-Sequence # - xx-Finish)

32: 120V & 277V

Order example for optional color temperatures: **32-612-2724**

27: 2700K, **35:** 3500K, **40:** 4000K

