

Pyxis Wall Sconce / Ceiling Mount

Universal Voltage: **32-612-xx**

oxygen

FIXTURE TYPE _____ LOCATION _____

PROJECT _____ DATE _____



-40 Aged Brass




-20 Polished Nickel



-24 Satin Nickel

| | |
|------------------------------------|---|
| LIGHT SOURCE | 1 x 22.2W LED, 3000K, CRI 90 |
| LUMINAIRE POWER | 26.1W at 120V |
| RATED LIFE | 60000 hr RL |
| OPTIONAL COLOR TEMPERATURES | 2700K, 3500K, 4000K |
| LUMEN OUTPUT | Delivered: 1329 lm (LM-79) |
| INPUT VOLTAGE | Universal Voltage 120V-277V |
| DRIVER OUTPUT | 600mA |
| DIMMING | 0-10v - 50/60Hz 100% to 10% Dimming |
| CONSTRUCTION | Plated Steel and Acrylic |
| DIFFUSER | - Matte White Acrylic |
| FINISHES | Polished Nickel (-20), Satin Nickel (-24), Aged Brass (-40) |
| MOUNTING | 4" Octagonal J-Box, 2"x3" J-box |
| STANDARDS | ETL Dry/Damp listed, ADA compliant, Conforms to UL STD 1598, Certified CAN/CSA, STD C22.2 No 250.0. |

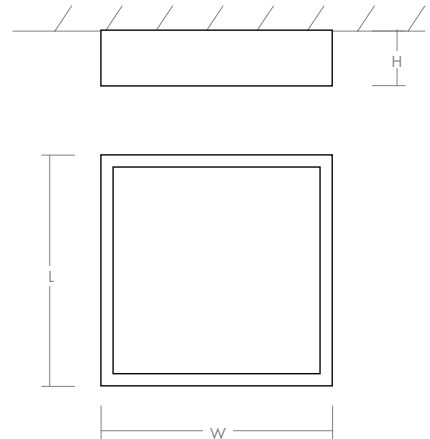

DIMENSIONS

| | |
|-------------|----------------------------------|
| W: | 10.25" |
| L: | 10.25" |
| H: | 3.25" |
| M.C: | 5.13" From top of fixture |

Order example for standard fixture:

32-612-24 (x- Voltage - xxx-Sequence # - xx-Finish)

32: Universal Voltage

Order example for optional color temperatures: **32-612-2724**

27: 2700K, **35:** 3500K, **40:** 4000K

