

# ZEPP Pendant

Universal Voltage: **32-633-xx**

# oxygen

FIXTURE TYPE \_\_\_\_\_ LOCATION \_\_\_\_\_

PROJECT \_\_\_\_\_ DATE \_\_\_\_\_



-20 Polished Nickel




-24 Satin Nickel



-15 Black

<b>LIGHT SOURCE</b>	2 x 25W LED, 3000K, CRI 90
<b>LUMINAIRE POWER</b>	56.1W at 120V
<b>RATED LIFE</b>	60000 hr RL
<b>OPTIONAL COLOR TEMPERATURES</b>	2700K, 3500K, 4000K
<b>LUMEN OUTPUT</b>	Delivered: 863 lm (LM-79)
<b>INPUT VOLTAGE</b>	Universal Voltage 120V-277V
<b>DRIVER OUTPUT</b>	1400mA, 50W
<b>DIMMING</b>	0-10v - 50/60Hz 100% to 10% Dimming
<b>CONSTRUCTION</b>	Plated Steel and Acrylic
<b>DIFFUSER</b>	- Matte White Acrylic
<b>FINISHES</b>	Black (-15), Polished Nickel (-20), Satin Nickel (-24)
<b>MOUNTING</b>	4" Octagonal J-Box, 2"x 3" J-Box
<b>STANDARDS</b>	ETL Dry/Damp listed, Conforms to UL STD 1598, Certified CAN/CSA

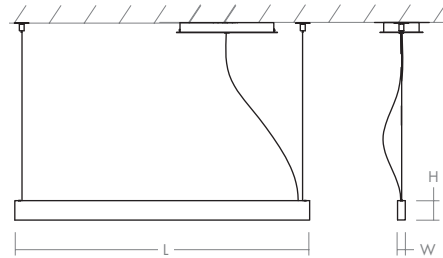

#### DIMENSIONS

**Canopy: 13.00" L, 5.50" W, 1.375" H**

**Fixture: 50.00" L, 1.00" W, 2.50" H**

**Suspension Length: Up to 60"**

Order example for standard fixture:

**32-633-24** (x- Voltage - xxx-Sequence # - xx-Finish)

**32:** Universal Voltage

Order example for optional color temperatures: **32-633-2724**

**27:** 2700K, **35:** 3500K, **40:** 4000K

