

KLONE Pendant

Universal Voltage: **32-642-xx**


oxygen

FIXTURE TYPE _____ LOCATION _____

PROJECT _____ DATE _____



-20 Polished Nickel

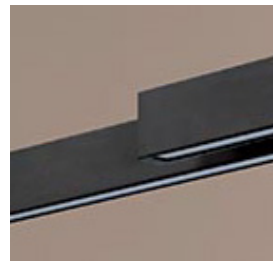

-15 Black



-24 Satin Nickel

LIGHT SOURCE 2 x 25W LED, 3000K, CRI 90

LUMINAIRE POWER 56.7W at 120V

RATED LIFE 60000 hr RL

OPTIONAL COLOR TEMPERATURES 2700K, 3500K, 4000K

LUMEN OUTPUT Delivered: 745 lm (LM-79)

INPUT VOLTAGE Universal Voltage 120V -277V

DRIVER OUTPUT 1400mA, 50W

DIMMING 0-10v - 50/60Hz 100% to 10% Dimming


CONSTRUCTION Plated Steel and Acrylic

DIFFUSER - Matte White Acrylic

FINISHES Black (-15), Polished Nickel (-20), Satin Nickel (-24)

MOUNTING 4" Octagonal J-Box, 2"x 3" J-Box

STANDARDS ETL Dry/Damp listed, Conforms to UL STD 1598, Certified CAN/CSA

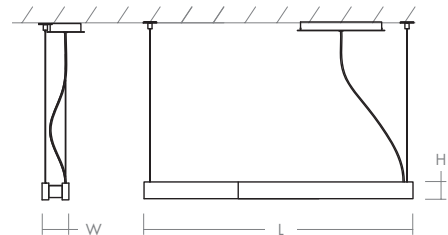

DIMENSIONS

Canopy: 13.00" L, 5.50" W, 1.375" H

Fixture: 40.00" L, 4.00" W, 2.50" H

Suspension Length: Up to 60"

Order example for standard fixture:

32-642-24 (x- Voltage - xxx-Sequence # - xx-Finish)

32: Universal Voltage

Order example for optional color temperatures: **3-642-2724**

27: 2700K, **35:** 3500K, **40:** 4000K

