

# Ellipse Ceiling Mount

120v: **3-354-xxx**

277v: **37-354-xxx**

oxygen

FIXTURE TYPE \_\_\_\_\_


LOCATION \_\_\_\_\_

PROJECT \_\_\_\_\_

DATE \_\_\_\_\_



-20 Polished Nickel



-15 Black



-24 Satin Nickel

**Diffusers:**




-1 White Opal Glass



-2 Matte White Acrylic

<b>LIGHT SOURCE</b>	1 x 5.12W LED, 3000K, CRI 90
<b>LUMINAIRE POWER</b>	6.59W at 120V
<b>RATED LIFE</b>	60000 hr RL
<b>OPTIONAL COLOR TEMPERATURES</b>	2700K, 3500K, 4000K
<b>LUMEN OUTPUT</b>	Delivered: (-1) Glass 176 lm (LM-79) (-2) Acrylic 191 lm (LM-79)
<b>INPUT VOLTAGE</b>	120V or 277V
<b>DRIVER OUTPUT</b>	150mA, 6W
<b>DIMMING</b>	0-10v & Phase (ELV) Dimming - 50/60Hz 100% to 10% Dimming
<b>CONSTRUCTION</b>	Plated Steel and Acrylic
<b>DIFFUSER</b>	(-1) White Opal Glass, (-2) Matte White Acrylic
<b>FINISHES</b>	Black (-15), Polished Nickel (-20), Satin Nickel (-24)
<b>MOUNTING</b>	4" Octagonal J-Box*, 2"x3" J-Box* *Deep J-Box (Required to house driver)
<b>STANDARDS</b>	ETL Dry/Damp listed, CEC Title 24 Compliant, Conforms to UL STD 1598, Certified CAN/CSA, STD C22.2 No 250.0.

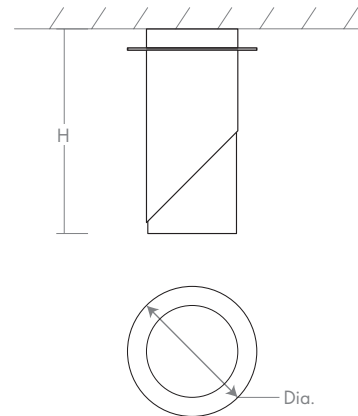

**DIMENSIONS**

<b>Dia.:</b>	<b>5.88"</b>
<b>H:</b>	<b>8.73"</b>
<b>Diffuser Dia.:</b>	<b>3.50"</b>
<b>M.C.:</b>	<b>2.94"</b>

Order example for standard fixture:

**3-354-124** (x- Voltage - xxx-Sequence # - x-Diffuser - xx-Finish)

3: 120v, 37: 277v

Order example for optional color temperatures: **3-354-27124**

27: 2700K, 35: 3500K, 40: 4000K

