

Oracle Wall Sconce / Ceiling Mount

120v: **3-618-xx**
277v: **37-618-xx**

oxygen

FIXTURE TYPE _____ LOCATION _____

PROJECT _____ DATE _____



-14 Polished Chrome



-22 Oiled Bronze





-24 Satin Nickel



-40 Aged Brass

LIGHT SOURCE	1 x 8.2W LED, 3000K, CRI 90
LUMINAIRE POWER	10.4W at 120V
RATED LIFE	60000 hr RL
OPTIONAL COLOR TEMPERATURES	2700K, 3500K, 4000K
LUMEN OUTPUT	Delivered: 773 lm (LM-79)
INPUT VOLTAGE	120V or 277V
DRIVER OUTPUT	350mA, 12W
DIMMING	0-10v & Phase (ELV) Dimming - 50/60Hz 100% to 10% Dimming
CONSTRUCTION	Plated Steel and Acrylic
DIFFUSER	- Matte White Acrylic
FINISHES	Polished Chrome (-14), Oiled Bronze (-22), Satin Nickel (-24), Aged Brass (-40)
MOUNTING	4" Octagonal J-Box
STANDARDS	ETL Dry/Damp listed, ADA compliant, CEC Title 24 Compliant, Conforms to UL STD 1598, Certified CAN/CSA, STD C22.2 No 250.0.

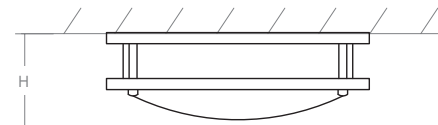

DIMENSIONS
Dia: 10.38"
H: 3.44"

Order example for standard fixture:

3-618-22 (x- Voltage - xxx-Sequence # - xx-Finish)

3: 120v, 37: 277v, 32: Universal Voltage

Order example for optional color temperatures: **3-618-2722**

27: 2700K, 35: 3500K, 40: 4000K

