

# ELLIPSE Pendant

120V: **3-668-xxx**  
 277V: **37-668-xxx**

oxygen

FIXTURE TYPE \_\_\_\_\_ LOCATION \_\_\_\_\_

PROJECT \_\_\_\_\_ DATE \_\_\_\_\_



-24 Satin Nickel



-15 Black



-20 Polished Nickel



-1 White Opal Glass  
 -2 Matte White Acrylic

**LIGHT SOURCE** 1 x 5.2W LED, 3000K, CRI 90

**LUMINAIRE POWER** 6.59W at 120V

**RATED LIFE** 60000 hr RL

**OPTIONAL COLOR TEMPERATURES** 2700K, 3500K, 4000K

**LUMEN OUTPUT** Delivered: (-1) Glass: 176 lm (LM-79)  
 Delivered: (-2) Acrylic: 177 lm (LM-79)

**INPUT VOLTAGE** 120V or 277V

**DRIVER OUTPUT** 150mA, 6W max


**DIMMING** 0-10V & Phase (ELV) Dimming - 50/60Hz  
 100% to 10% Dimming

**CONSTRUCTION** Plated Steel and Acrylic / Glass

**METAL FINISH / DIFFUSER**  
 (-115) White Opal Glass / Black  
 (-120) White Opal Glass / Polished Nickel  
 (-124) White Opal Glass / Satin Nickel  
 (-215) Matte White Acrylic / Black  
 (-220) Matte White Acrylic / Polished Nickel  
 (-224) Matte White Acrylic / Satin Nickel

**MOUNTING** 4" Octagonal J-Box\*  
 4"x4" Square J-Box\* with single device mud ring  
 \*Deep J-Box (Required to house driver)

**STANDARDS** ETL Dry/Damp listed, Conforms to UL STD 1598,  
 Certified CAN/CSA STD C22.2 No 250.0.

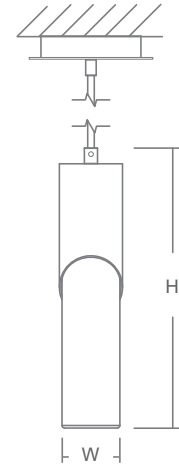

### DIMENSIONS

**Dia. Canopy: 5.88"**

**Dia. Fixture: 3.00"**

**H. Fixture: 13.25"**

**Note: Provided with 10 ft. of Braided Cord**

Order example for standard fixture:

**3-668-xxx** (x-Voltage - xxx-Sequence # - x-Diffuser - xx-Finish)

**3:** 120V, **37:** 277V

Order example for optional color temperatures: **3-668-27124**

**27:** 2700K, **35:** 3500K, **40:** 4000K

