

ELLIPSE Pendant

120V: **3-677-xxx**
 277V: **37-677-xxx**

oxygen

FIXTURE TYPE _____ LOCATION _____

PROJECT _____ DATE _____



-15 Black



-20 Polished Nickel



-24 Satin Nickel



-1 White Opal Glass
 -2 Matte White Acrylic

LIGHT SOURCE 1 x 5.2W LED, 3000K, CRI 90

LUMINAIRE POWER 6.59W at 120V

RATED LIFE 60000 hr RL

OPTIONAL COLOR TEMPERATURES 2700K, 3500K, 4000K

LUMEN OUTPUT Delivered: (-1) Glass: 224 lm (LM-79)
 Delivered: (-2) Acrylic: 216 lm (LM-79)

INPUT VOLTAGE 120V or 277V

DRIVER OUTPUT 150mA, 6W max


DIMMING 0-10V & Phase (ELV) Dimming - 50/60Hz
 100% to 10% Dimming

CONSTRUCTION Plated Steel and Acrylic / Glass

METAL FINISH / DIFFUSER
 (-115) White Opal Glass / Black
 (-120) White Opal Glass / Polished Nickel
 (-124) White Opal Glass / Satin Nickel
 (-215) Matte White Acrylic / Black
 (-220) Matte White Acrylic / Polished Nickel
 (-224) Matte White Acrylic / Satin Nickel

MOUNTING 4" Octagonal J-Box*
 4"x4" Square J-Box* with single device mud ring
 *Deep J-Box (Required to house driver)

STANDARDS ETL Dry/Damp listed, Conforms to UL STD 1598,
 Certified CAN/CSA STD C22.2 No 250.0.

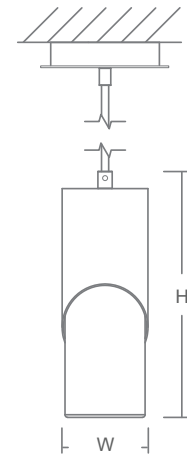

DIMENSIONS

Dia. Canopy: 5.88"

Dia. Fixture: 3.00"

H. Fixture: 10.75"

Note: Provided with 10 ft. of Braided Cord

Order example for standard fixture:

3-677-xxx (x-Voltage - xxx-Sequence # - x-Diffuser - xx-Finish)

3: 120V, **37:** 277V

Order example for optional color temperatures: **3-677-27124**

27: 2700K, **35:** 3500K, **40:** 4000K

