

# CELENA Outdoor (Wall / Ceiling)

120v : **3-715-xx**

277v : **37-715-xx**

# oxygen

FIXTURE TYPE \_\_\_\_\_

LOCATION \_\_\_\_\_

PROJECT \_\_\_\_\_

DATE \_\_\_\_\_




-15 Black



-16 Gray

<b>LIGHT SOURCE</b>	2 x 10.1W LED, 3000K, CRI 90
<b>LUMINAIRE POWER</b>	24.9W at 120V
<b>RATED LIFE</b>	60000 hr RL
<b>OPTIONAL COLOR TEMPERATURES</b>	2700K, 3500K, 4000K
<b>LUMEN OUTPUT</b>	Delivered: 847 lm (LM-79)
<b>INPUT VOLTAGE</b>	120V or 277V
<b>DRIVER OUTPUT</b>	2 x 350 mA, 12W
<b>DIMMING</b>	0-10v & Phase (ELV) Dimming - 50/60Hz 100% to 10% Dimming
<b>CONSTRUCTION</b>	Cast Aluminium and Polycarbonate
<b>DIFFUSER</b>	- Polished White Polycarbonate
<b>FINISHES</b>	Black (-15), Gray (-16)
<b>MOUNTING</b>	4" Octagonal J-Box (Installer must provide a bead of caulk between fixture housing and mounting surface)
<b>STANDARDS</b>	ETL Wet, ADA compliant, Conforms to UL STD 1598, Certified CAN/CSA, STD C22.2 No 250.0.

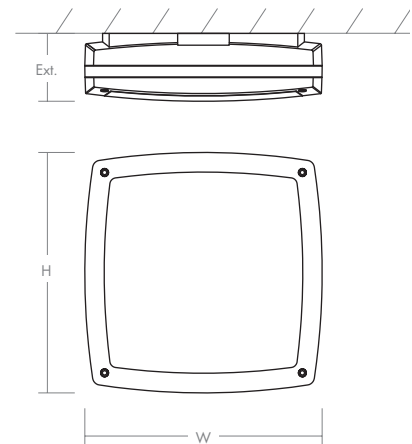

#### DIMENSIONS

**W:** 11.82"

**H:** 11.82"

**Ext.:** 3.33"

**M.C.:** 5.91" From top of fixture

Order example for standard fixture:

**3-715-15** (x- Voltage - xxx-Sequence # - xx-Finish)

**3:** 120v, **37:** 277v

Order example for optional color temperatures: **3-715-2715**

**27:** 2700K, **35:** 3500K, **40:** 4000K

