

CELENA Outdoor (Wall / Ceiling)

120v : **3-715-xx**

277v : **37-715-xx**

oxygen

FIXTURE TYPE _____

LOCATION _____

PROJECT _____

DATE _____




-15 Black



-16 Gray

LIGHT SOURCE	2 x 10.1W LED, 3000K, CRI 90
LUMINAIRE POWER	24.9W at 120V
RATED LIFE	60000 hr RL
OPTIONAL COLOR TEMPERATURES	2700K, 3500K, 4000K
LUMEN OUTPUT	Delivered: 847 lm (LM-79)
INPUT VOLTAGE	120V or 277V
DRIVER OUTPUT	2 x 350 mA, 12W
DIMMING	0-10v & Phase (ELV) Dimming - 50/60Hz 100% to 10% Dimming
CONSTRUCTION	Cast Aluminium and Polycarbonate
DIFFUSER	- Polished White Polycarbonate
FINISHES	Black (-15), Gray (-16)
MOUNTING	4" Octagonal J-Box (Installer must provide a bead of caulk between fixture housing and mounting surface)
STANDARDS	ETL Wet, ADA compliant, Conforms to UL STD 1598, Certified CAN/CSA, STD C22.2 No 250.0.

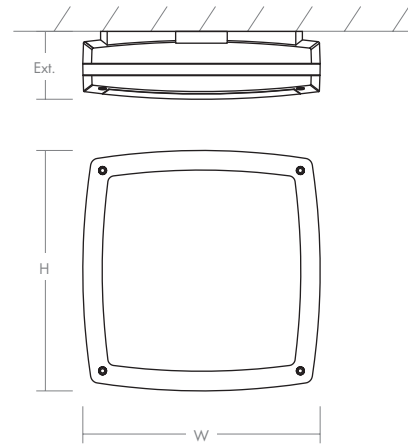

DIMENSIONS

W: 11.82"

H: 11.82"

Ext.: 3.33"

M.C.: 5.91" From top of fixture

Order example for standard fixture:

3-715-15 (x- Voltage - xxx-Sequence # - xx-Finish)

3: 120v, **37:** 277v, **32:** Universal Voltage

Order example for optional color temperatures: **3-715-2715**

27: 2700K, **35:** 3500K, **40:** 4000K

