

MAIA Outdoor

120v : **3-741-xx**

277v : **37-741-xx**

oxygen

FIXTURE TYPE _____

LOCATION _____

PROJECT _____

DATE _____



-22 Oiled Bronze



-16 Gray

LIGHT SOURCE 1 x 11.9W LED, 3000K, CRI 90

LUMINAIRE POWER 15.3W at 120V

RATED LIFE 60000 hr RL

OPTIONAL COLOR TEMPERATURES 2700K, 3500K, 4000K

LUMEN OUTPUT Delivered: 465 lm (LM-79)

INPUT VOLTAGE 120V or 277V

DRIVER OUTPUT 350 mA, 12W

DIMMING 0-10v &Phase (ELV) Dimming - 50/60Hz 100% to 10% Dimming


CONSTRUCTION Cast Aluminium and Acrylic

DIFFUSER - Matte White Acrylic

FINISHES Gray (-16), Oiled Bronze (-22)

MOUNTING 4" Octagonal J-Box*, 2"x 3" J-Box
*With optional backplate
(Installer must provide a bead of caulk between fixture housing and mounting surface)

STANDARDS ETL Wet, ADA compliant, Conforms to UL STD 1598, Certified CAN/CSA, STD C22.2 No 250.0.

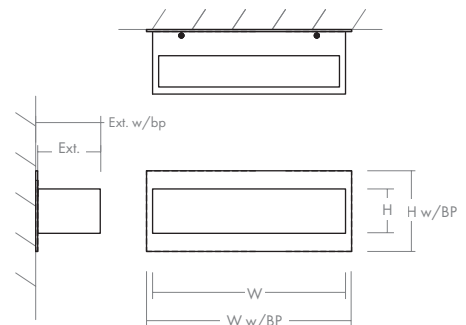

DIMENSIONS

W: 12.25"

H: 2.75"

Ext: 3.88"

M.C: 1.38" From top of fixture

With optional backplate

W: 13.00"

H: 5.00"

Ext: 4.00"

M.C: 2.50" From top of fixture

Order example for standard fixture:

3-741-22 (x- Voltage - xxx-Sequence # - xx-Finish)

3: 120v, **37:** 277v

Order example for optional color temperatures: **3-741-2722**

27: 2700K, **35:** 3500K, **40:** 4000K

