



SIDE VIEW

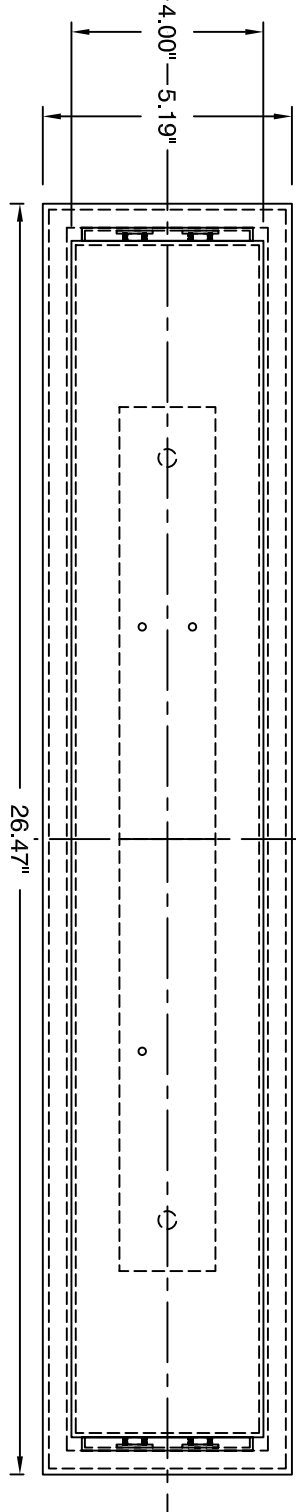

FRONT VIEW

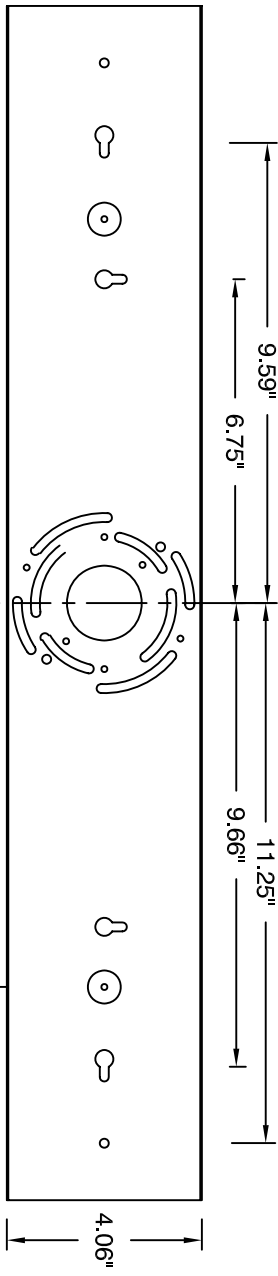

MOUNTING PLATE

OXYGEN LIGHTING ©

LAMPING

- o 2x11w Array, 3000k, 350mA
- o 50000 Hr Life Span (L70)
- o L/W 89 at array level
- o Efficacy: 48.4 L/W (LM79)
- o CRI >80
- o Color Consistency: 3 step Macadam Ellipse

DRIVER

- o 120-277V, .700mA

METAL FINISH

- o satin nickel

DIMENSIONS

- o 26" (w)
- o 5.19" (h)
- o 3.94" extension

INSTALLATION

- o 4" octagonal "J"-Box
- o ETL Dry/Damp Listed
- o Approved for ceiling or wall mounting
- o Conforms to UL STD 1598
- o Certified CAN/CSA STD C22.2 No. 250.0
- o LM79 and LM80 available

THE FUSE vanity

oxygen **CDX-2170**

oxygen

OXYGEN LIGHTING
 201 RAILHEAD RD, FORT WORTH, TX 76106
 TEL. (877) 607-0202 FAX (877) 607-0203
 WWW.OXYGENLIGHTING.COM

PROJECT: _____

DATE: _____