


SIDE VIEW

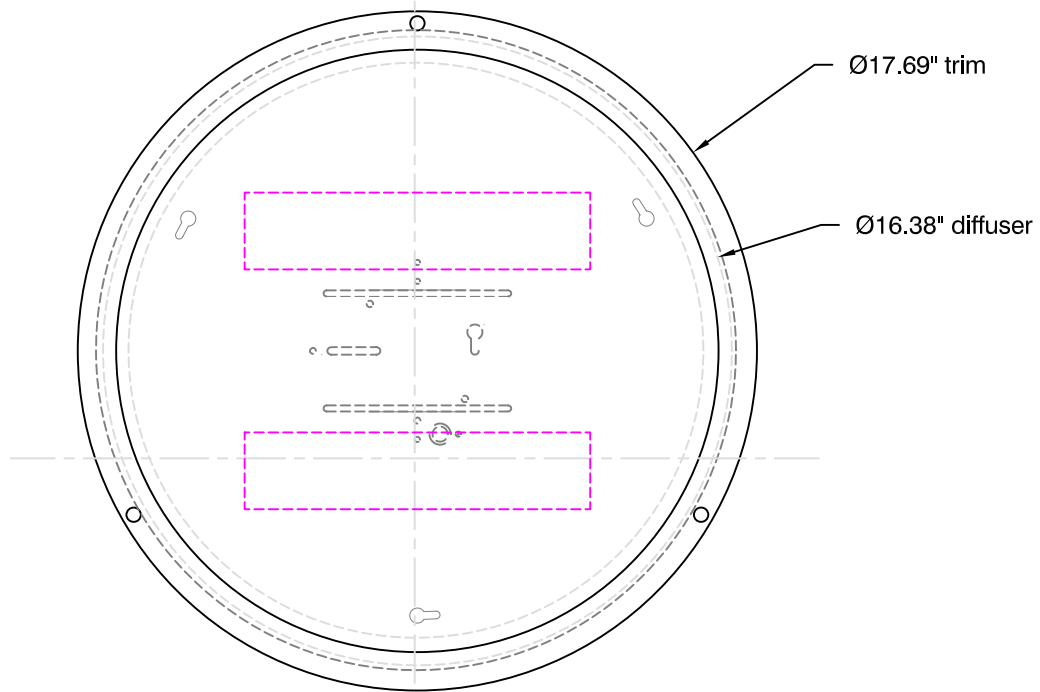

BOTTOM VIEW

ORACLE ceiling mount
oxygen **CDX-2176**

OXYGEN LIGHTING ©

LAMPING

- o 2x11w LED array - 3500k
- o 50000 Hr Life Span (L₇₀)
- o L/W 89 at array level
- o Efficacy: 48.8 L/W (LM₇₉)
- o CRI > 80
- o Color Consistency: 3 step Macadam Ellipse

DRIVER (Non dimable)

- o Two Drivers
- Class 2, Constant Current
- 15w, 350 mA (per driver)
- Total Input: 29.1w

DIFFUSER

- o matte white acrylic

METAL FINISH

- o satin nickel

DIMENSIONS

- o Ø17.69" x 4.25"(h)

INPUT VOLTAGE

120v 50/ 60HZ

INSTALLATION

- o 4" octagonal "J"-Box
- o ETL Dry/Damp Listed
- o Approved for ceiling or wall mounting
- o Conforms to UL STD 1598
- o Certified CAN/CSA STD C22.2 No. 250.0
- o LM79 and LM80 available

oxygen

OXYGEN LIGHTING
201 RAILHEAD RD, FORT WORTH, TX 76106
TEL. (877) 607-0202 FAX (877) 607-0203
WWW.OXYGENLIGHTING.COM

PROJECT: _____

DATE: _____