


twist-lock, mini-bi pin lampholders

screws on top side secure housing to mounting plate, and pull housing to mounting surface

formed steel ballast housing


1.14" M.C.
 Ø1.89" - end cap
 Ø1.58" - extruded acrylic diffuser

SIDE VIEW

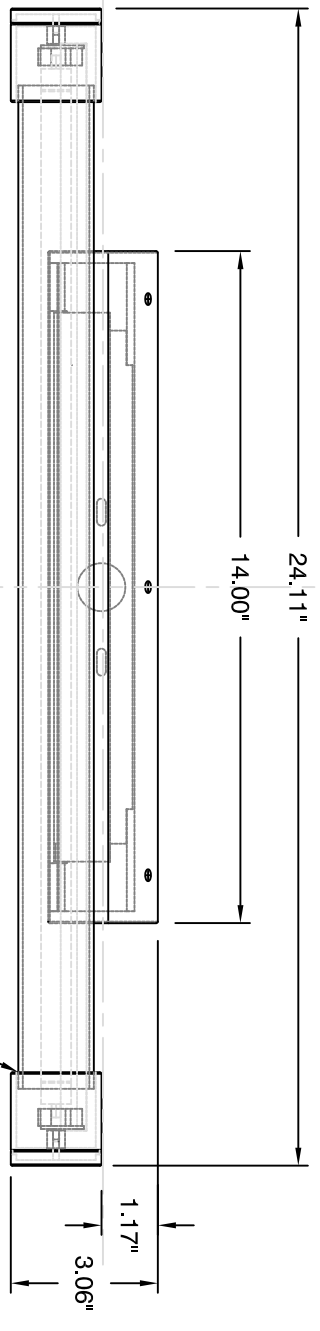

FRONT VIEW

extruded acrylic diffuser

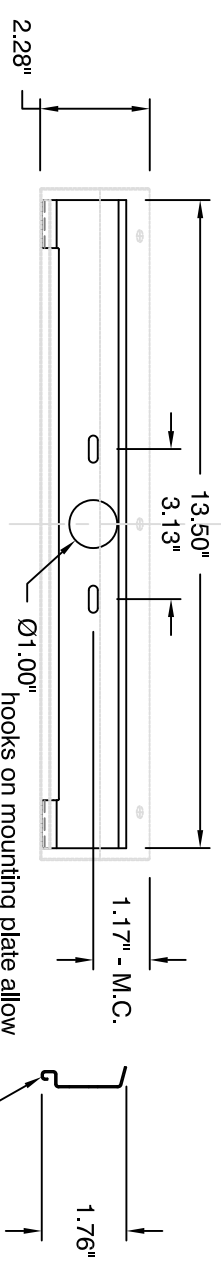

MOUNTING PLATE

hooks on mounting plate allow housing to hang freely during installation

1.17" - M.C.
 1.76"

OXYGEN LIGHTING ©

- LAMPING**
- o 1 x 14W T5 fluorescent (mini bi-pin)
 - o Initial Lumens: 1200 lm
 - o Delivered Lumens: 832 lm
- BALLAST**
- o Electronic, HPF
 - o Programmed Start
 - o Universal Voltage
- VOLTAGE**
- o 120/277V

- METAL FINISHES**
- o 14 - Polished Chrome
 - o 24 - Satin Nickel
- DIFFUSER**
- o Matte White Acrylic

- DIMENSIONS**
- o 24.11" (W)
 - o 3.06" (H)
 - o 3.14" extension

- INSTALLATION**
- o 2'x3' J-Box
 - o UL Damp Listed
 - o ADA

Series # 2-5140 - **Finish** 24 = **Catalog Number** 2-5140-24

ZENITH vanity oxygen 2-5140-14

oxygen

OXYGEN LIGHTING
 201 RAILHEAD RD, FORT WORTH, TX 76106
 TEL. (877) 607-0202 FAX (877) 607-0203
 WWW.OXYGENLIGHTING.COM

PROJECT: _____
DATE: _____

