



**TOP VIEW**

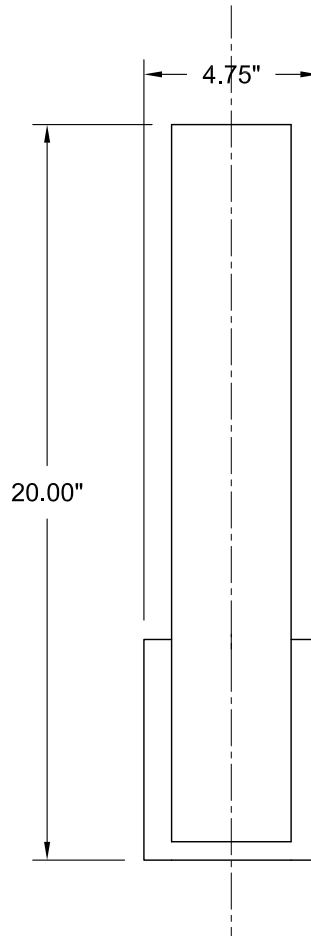

**FRONT VIEW**

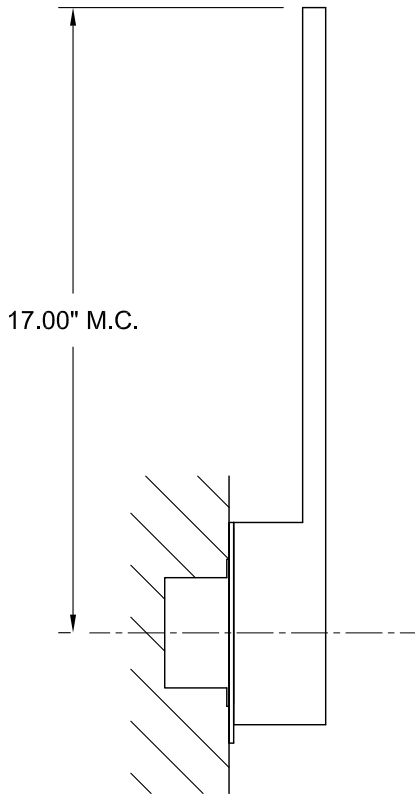

**SIDE VIEW**

**ICON** sconce  
 120v **3-511-25**  
 277v **37-511-25**

OXYGEN LIGHTING ©

**LAMPING**

- o (1x) 10.1w LED array
- o 3000K, 350mA
- o Initial Lumens: 1460 lm
- o Delivered Lumens: 804 lm
- o CRI >80
- o Color Consistency: 3 Step MacAdam Ellipse

**DRIVER (Dimmable)**

- o (1x) 0-10v & Reverse Phase Dimming Constant Current, 12w, 350mA

**METAL FINISHES**

- o **14** - Polished Chrome
- o **22** - Oiled Bronze
- o **24** - Satin Nickel
- o **25** - Satin Copper
- o **40** - Aged Brass

**DIFFUSER**

- o Matte White Acrylic

**INPUT VOLTAGE**

- o 120v OR 277v 50/60Hz

**DIMENSIONS**

- o 20.00" (h) x 4.75" (w) x 2.50" (ext.)
- o Without optional back plate: 19.5" (h) x 3.25" (w) x 2.38" (ext.)

**INSTALLATION**

- o 2" x 3" J-Box
- o 4" Octagonal w/optional back plate
- o ETL Dry/Damp Listed
- o ADA
- o Conforms to UL STD 1598
- o Certified CAN/CSA STD C22.2 No. 250.0



**Sample Catalog Number**

**Series # Finish Catalog number**  
 3-511 - 24 = 3-511-24

**oxygen**

**OXYGEN LIGHTING**  
 201 RAILHEAD RD, FORT WORTH, TX 76106  
 TEL. (877) 607-0202 FAX (877) 607-0203  
 WWW.OXYGENLIGHTING.COM

PROJECT: \_\_\_\_\_  
 DATE: \_\_\_\_\_