


TOP VIEW

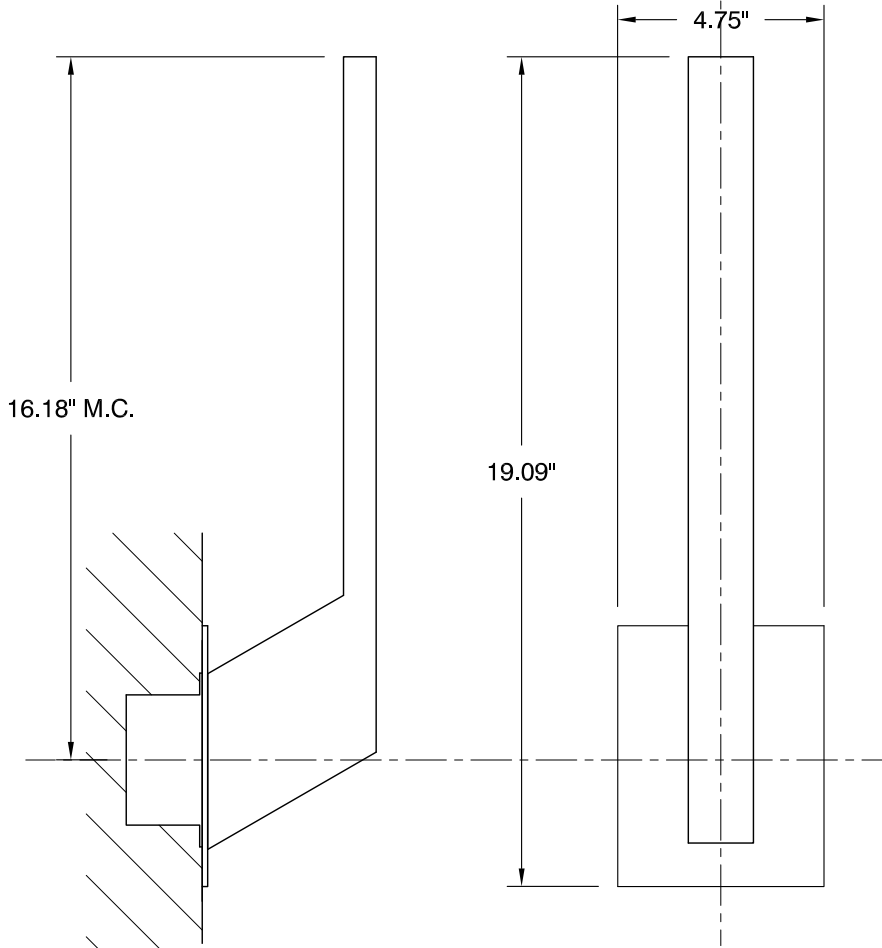

SIDE VIEW

FRONT VIEW

MIRAGE sconce
 120v **3-516-25**
 277v **37-516-25**

OXYGEN LIGHTING ©

LAMPING

- o (1x) 12.2w LED array
- o 3000K, 350mA
- o Initial Lumens: 1752 lm
- o Delivered Lumens: TBD
- o CRI > 80
- o Color Consistency: 3 Step MacAdam Ellipse

METAL FINISHES

- o 14 - Polished Chrome
- o 24 - Satin Nickel
- o 25 - Satin Copper
- o 40 - Aged Brass

DIMENSIONS

- o 4.75" (w) x 19.09" (h) x 4.00" (ext.)

INSTALLATION

- o 4" J-Box
- o ETL Dry/Damp Listed
- o ADA
- o Conforms to UL STD 1598
- o Certified CAN/CSA STD C22.2 No. 250.0

DRIVER (Dimmable)

- o (1x) 0-10v & Reverse Phase Dimming Constant Current, 12w, 350mA

INPUT VOLTAGE

- o 120v OR 277v 50/60Hz

DIFFUSER

- o Matte White Acrylic

Sample Catalog Number

Series # **Finish** **Catalog number**
 3-516 - 24 = 3-516-24



oxygen

OXYGEN LIGHTING
 201 RAILHEAD RD, FORT WORTH, TX 76106
 TEL. (877) 607-0202 FAX (877) 607-0203
 WWW.OXYGENLIGHTING.COM

PROJECT: _____

DATE: _____