



1.38" M.C.



SIDE VIEW

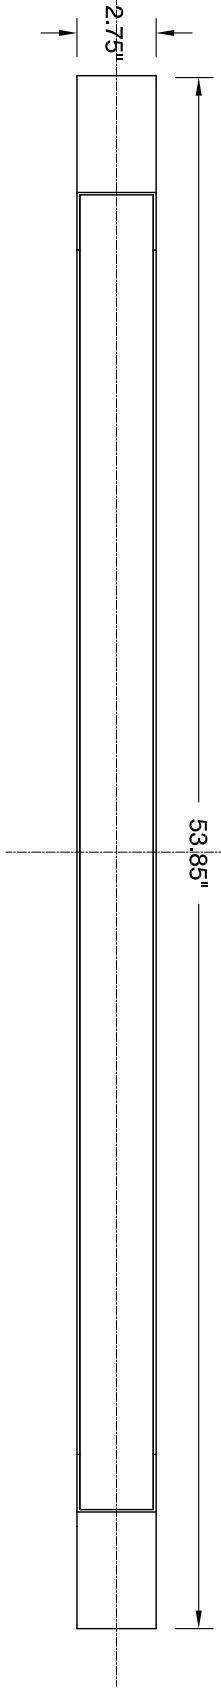

FRONT VIEW

OXYGEN LIGHTING ©

54" APOLLO vanity
120V 3-526-24
277V 37-526-24

- | | | | | |
|--|--|---|---|---|
| LAMPING | DRIVER (Dimmable) | METAL FINISHES | DIMENSIONS | INSTALLATION |
| <ul style="list-style-type: none"> o (2x) 11.6w LED array o 3000K, 350mA (ea.) o Initial Lumens: 3758 lm o Delivered Lumens: 1831 lm o CRI>80 o Color Consistency: 3 Step Macadam Ellipse | <ul style="list-style-type: none"> o (2x) 0-10v & Reverse Phase Dimming, Constant Current, 12w, 350mA | <ul style="list-style-type: none"> o 14 - Polished chrome o 22 - Oiled bronze o 24 - Satin nickel o 40 - Aged brass | <ul style="list-style-type: none"> o 53.85" (w) x 2.75" (h) x 2.50" (ext.) | <ul style="list-style-type: none"> o 2" x 3" J-Box o ETL Dry/Damp Listed o ADA o Conforms to UL STD 1598 o Certified CAN/CSA STD C22.2 No. 250.0 |
| INPUT VOLTAGE | | DIFFUSER | | |
| <ul style="list-style-type: none"> o 120v OR 277v 50/60Hz | | <ul style="list-style-type: none"> o Matte white acrylic | | |

Sample Catalog Number



Series # 3-526 - Finish 24 = Catalog number 3-526-24

PROJECT: _____

DATE: _____

Oxygen

OXYGEN LIGHTING
 201 RAILHEAD RD, FORT WORTH, TX 76106
 TEL. (877) 607-0202 FAX (877) 607-0203
 WWW.OXYGENLIGHTING.COM

