


**TOP VIEW**

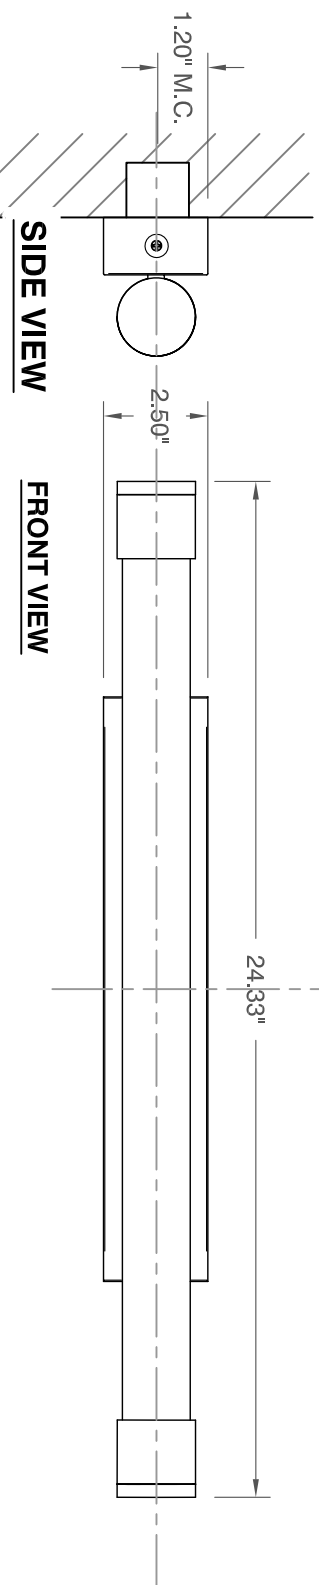

**SIDE VIEW**

**FRONT VIEW**

**OXYGEN LIGHTING ©**

**LAMPING**

- o (1x) 11.6w LED array
- o 3000K, 350mA
- o Initial Lumens: 1879 lm
- o Delivered Lumens: 1183 lm
- o CRI > 80
- o Color Consistency: 3 Step MacAdam Ellipse

**DRIVER (Dimming)**

- o (1x) 0-10v & Reverse Phase Dimming Constant Current, 12w, 350mA

**INPUT VOLTAGE**

- o 120v OR 277v 50/60Hz

**METAL FINISH**

- o 14 - Polished Chrome
- o 24 - Satin Nickel

**DIFFUSER**

- o Matte White Acrylic

**DIMENSIONS**

o 24.33" (w) x 2.50" (h) x 3.32" (ext.)

**INSTALLATION**

- o 2" x 3" J-Box
- o ETL Dry/Damp Listed
- o ADA
- o Conforms to UL STD 1598
- o Certified CAN/CSA STD C22.2 No. 250.0

**Zenith vanity**  
**120v 3-557-14**  
**277v 37-557-14**

Sample Catalog Number



Series # 3-557 - Finish 24 = Catalog number 3-557-24

PROJECT: \_\_\_\_\_

DATE: \_\_\_\_\_

**oxygen**

**OXYGEN LIGHTING**  
 201 RAILHEAD RD, FORT WORTH, TX 76106  
 TEL. (877) 607-0202 FAX (877) 607-0203  
 WWW.OXYGENLIGHTING.COM

