


TOP VIEW

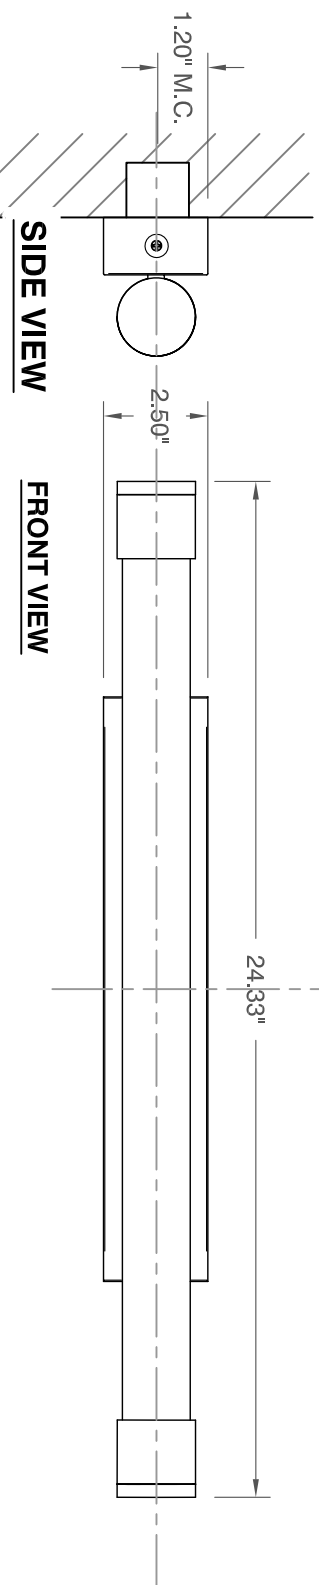

SIDE VIEW

FRONT VIEW

OXYGEN LIGHTING ©

LAMPING

- o (1x) 11.6w LED array
- o 3000K, 350mA
- o Initial Lumens: 1879 lm
- o Delivered Lumens: 1183 lm
- o CRI > 80
- o Color Consistency: 3 Step MacAdam Ellipse

DRIVER (Dimming)

- o (1x) 0-10v & Reverse Phase Dimming Constant Current, 12w, 350mA

INPUT VOLTAGE

- o 120v OR 277v 50/60Hz

METAL FINISH

- o 14 - Polished Chrome
- o 24 - Satin Nickel

DIFFUSER

- o Matte White Acrylic

DIMENSIONS

o 24.33" (w) x 2.50" (h) x 3.32" (ext.)

INSTALLATION

- o 2" x 3" J-Box
- o ETL Dry/Damp Listed
- o ADA
- o Conforms to UL STD 1598
- o Certified CAN/CSA STD C22.2 No. 250.0

Zenith vanity
120v 3-557-24
277v 37-557-24

Sample Catalog Number



Series # 3-557 - Finish 24 = Catalog number 3-557-24

PROJECT: _____

DATE: _____

Oxygen

OXYGEN LIGHTING
 201 RAILHEAD RD, FORT WORTH, TX 76106
 TEL. (877) 607-0202 FAX (877) 607-0203
 WWW.OXYGENLIGHTING.COM

