



TOP VIEW

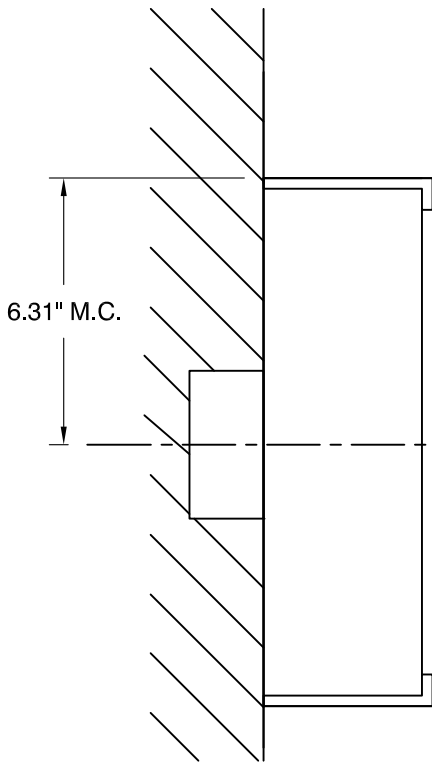

SIDE VIEW

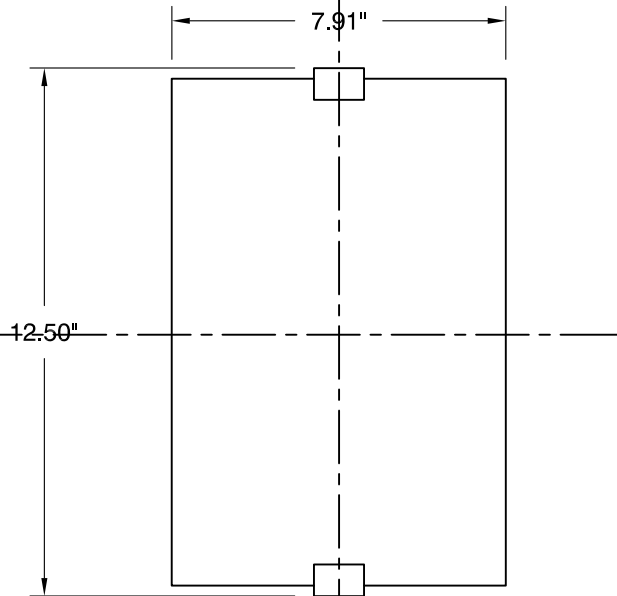

FRONT VIEW

SIREN sconce
 120v **3-563-214**
 277v **37-563-214**

OXYGEN LIGHTING ©

LAMPING

- o (1x) 10.1w Array
- o 3000K, 350mA
- o Initial Lumens: 1460 lm
- o Delivered Lumens: TBD
- o CRI > 80
- o Color Consistency: 3 step MacAdam Ellipse

METAL FINISH

- o 14 - Polished Chrome
- o 24 - Satin Nickel

DIMENSIONS

- o 7.91" (w) x 12.50" (h) x 4.00" (ext.)

INSTALLATION

- o 4" Octagonal J-Box
- o ETL Dry/Damp Listed
- o Wall mount
- o ADA
- o Conforms to UL STD 1598
- o Certified CAN/CSA STD C22.2 No. 250.0

DRIVER (Dimmable)

- o (1x) 0-10v & Reverse Phase Dimming Constant Current, 12w, 350mA

DIFFUSERS

- o 1 - White Opal Glass
- o 2 - Matte White Acrylic
- o 4 - Faux Onyx Acrylic
- o 6 - Silver Cloth Acrylic

INPUT VOLTAGE

- o 120v OR 277v 50/60Hz

Sample Catalog Number



| Series # | Diffuser | Finish | Catalog number |
|----------|----------|--------|----------------|
| 3-563 | - 2 | 14 | = 3-563-214 |

oxygen

OXYGEN LIGHTING
 201 RAILHEAD RD, FORT WORTH, TX 76106
 TEL. (877) 607-0202 FAX (877) 607-0203
 WWW.OXYGENLIGHTING.COM

PROJECT: _____
 DATE: _____

