


**TOP VIEW**

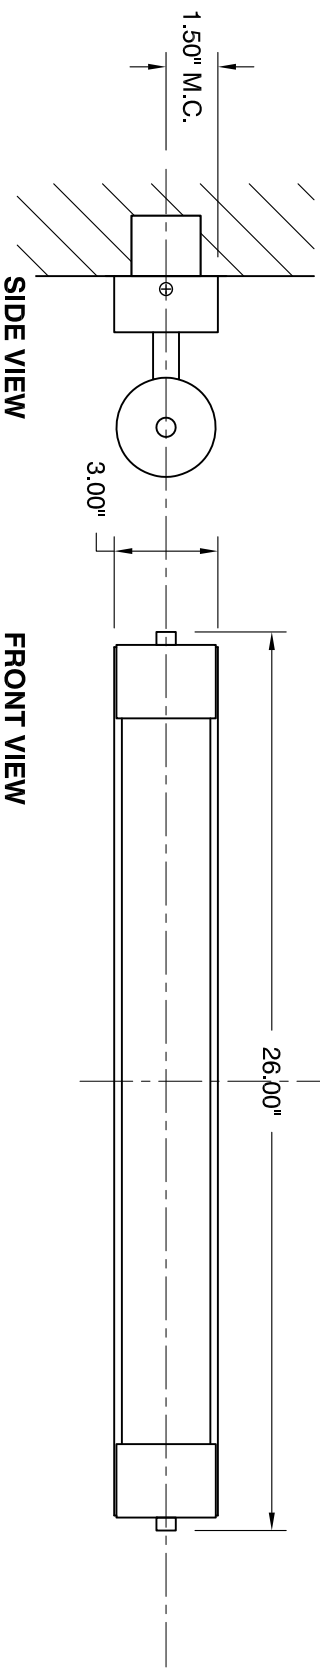

**SIDE VIEW**

**FRONT VIEW**

**24" HORIZON LED vanity**  
**120v 3-593-24**  
**277v 37-593-24**

OXYGEN LIGHTING ©

|   |   |  |  |  |
|---|---|--|--|--|
| <p><b>LAMPING</b></p> <ul style="list-style-type: none"> <li><input type="radio"/> (1x) 11.6w LED array</li> <li><input type="radio"/> 3000K, 350ma</li> <li><input type="radio"/> Initial Lumens: 1879 lm</li> <li><input type="radio"/> Delivered Lumens: TBD</li> <li><input type="radio"/> CRI &gt;80</li> <li><input type="radio"/> Color Consistency: 3 Step MacAdam Ellipse</li> </ul> | <p><b>DRIVER (Dimmable)</b></p> <ul style="list-style-type: none"> <li><input type="radio"/> (1x) 0-10v &amp; Reverse Phase Dimming Constant Current, 12w, 350ma</li> </ul> | <p><b>METAL FINISHES</b></p> <ul style="list-style-type: none"> <li><input type="radio"/> 14 - Polished Chrome</li> <li><input type="radio"/> 24 - Satin Nickel</li> </ul> | <p><b>DIMENSIONS</b></p> <ul style="list-style-type: none"> <li><input type="radio"/> 26.00" (w) x 3.00" (h) x 5.81" (ext.)</li> </ul> | <p><b>INSTALLATION</b></p> <ul style="list-style-type: none"> <li><input type="radio"/> 2" x 3" J-Box</li> <li><input type="radio"/> ETL Dry/Damp Listed</li> <li><input type="radio"/> Conforms to UL STD 1598 Certified CAN/CSA STD C22.2 No. 250.0</li> </ul> |
| <p><b>INPUT VOLTAGE</b></p> <ul style="list-style-type: none"> <li><input type="radio"/> 120v OR 277v 50/60Hz</li> </ul>  | <p><b>DIFFUSER</b></p> <ul style="list-style-type: none"> <li><input type="radio"/> Matte White Acrylic</li> </ul>  |  |  |  |

Sample Catalog Number

|          |    |   |                |
|----------|----|---|----------------|
| Series # | 24 | = | Catalog Number |
| 3-593    |    |   | 3-593-24       |



# oxygen

**OXYGEN LIGHTING**  
 201 RAILHEAD RD, FORT WORTH, TX 76106  
 TEL. (877) 607-0202 FAX (877) 607-0203  
 WWW.OXYGENLIGHTING.COM

PROJECT: \_\_\_\_\_  
 DATE: \_\_\_\_\_

