


FRONT VIEW

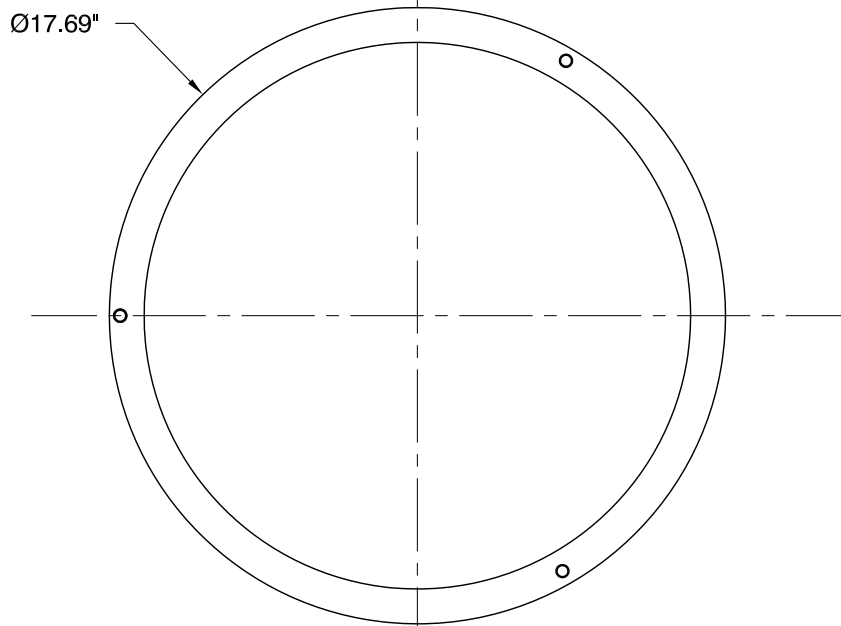

BOTTOM VIEW

ORACLE ceiling mount
 120v **3-620-22**
 277v **37-620-22**

OXYGEN LIGHTING ©

LAMPING

- o (2x) 10.1w LED array
- o 3000K, 350mA (ea.)
- o Initial Lumens: 2920 lm
- o Delivered Lumens: TBD
- o CRI>80
- o Color Consistency: 3 Step MacAdam Ellipse

DRIVER (Dimmable)

- o (2x) 0-10v & Reverse Phase Dimming Constant Current, 12w, 350mA

METAL FINISHES

- o **14** - Polished Chrome
- o **22** - Oiled Bronze
- o **24** - Satin Nickel
- o **40** - Aged Brass

DIFFUSER

- o Matte White Acrylic

INPUT VOLTAGE

- o 120v OR 277v 50/60Hz

DIMENSIONS

- o Ø17.69" x 4.25"(h)

INSTALLATION

- o 4" Octagonal J-Box
- o ETL Dry/Damp Listed
- o Approved for ceiling or wall mounting
- o Conforms to UL STD 1598
- o Certified CAN/CSA STD C22.2 No. 250.0

Sample Catalog Number

Series # **Finish** **Catalog number**
 3-620 - 24 = 3-620-24



oxygen

OXYGEN LIGHTING
 201 RAILHEAD RD, FORT WORTH, TX 76106
 TEL. (877) 607-0202 FAX (877) 607-0203
 WWW.OXYGENLIGHTING.COM

PROJECT: _____

DATE: _____

