



TOP VIEW

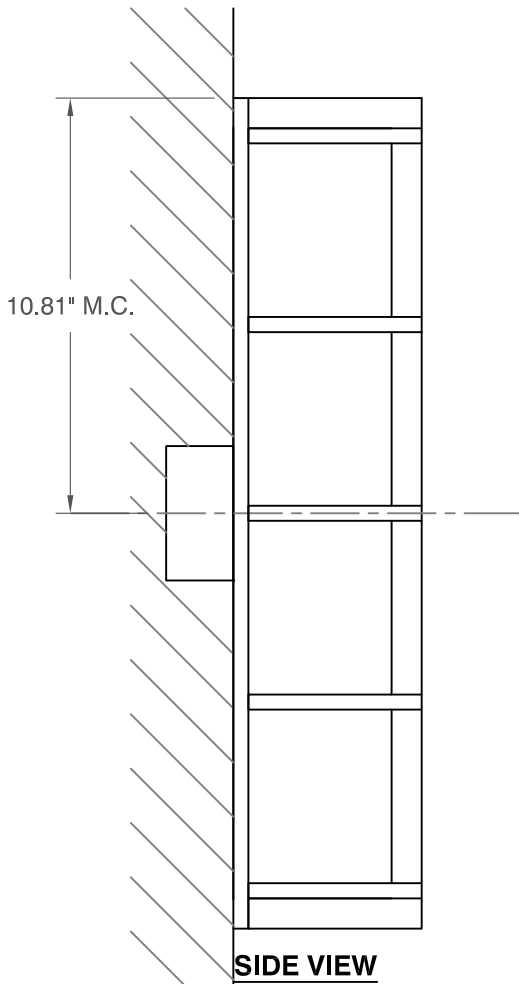

SIDE VIEW

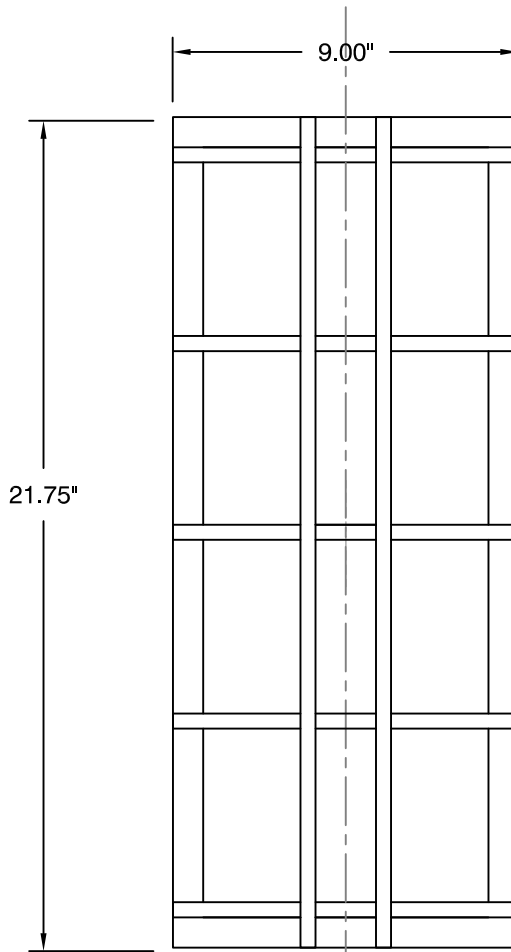

FRONT VIEW

TELSHOR outdoor
 120v **3-711-224**
 277v **37-711-224**

OXYGEN LIGHTING ©

LAMPING

- o (2x) 10.1w LED Arrays
- o 3000K, 350mA (ea.)
- o Initial Lumens: 2920 lm
- o Delivered Lumens: 988 lm
- o CRI >80
- o Color Consistency: 3 Step MacAdams Ellipse

DRIVER (Dimmable)

- o (2x) 0-10v & Reverse Phase Dimming Constant Current, 12w, 350mA

METAL FINISHES

- (All finishes polyester powdercoat)
- o 22 - Oiled Bronze
 - o 24 - Satin Nickel

DIFFUSER

- o 2 - Matte White Acrylic

INPUT VOLTAGE

- o 120v OR 277v 50/60Hz

DIMENSIONS

- o 9.00" (w) x 21.75" (h) x 5.00" (ext.)

SPECIAL NOTE

- o Add caulking around fixture base at the wall to prevent water from entering fixture.

INSTALLATION

- o 4" Octagonal J-Box
- o ETL WET Listed (installer must provide a bead of caulk between fixture housing and mounting surface)
- o Wall mount
- o Conforms to UL STD 1598
- o Certified CAN/CSA STD C22.2 No. 250.0

Sample Catalog Number



Series #	Diffuser	Finish	Catalog Number
3-711	- 2	24	= 3-711-224

oxygen

OXYGEN LIGHTING
 201 RAILHEAD RD, FORT WORTH, TX 76106
 TEL. (877) 607-0202 FAX (877) 607-0203
 WWW.OXYGENLIGHTING.COM

PROJECT: _____

DATE: _____

